


CORNER RESTORATION

CORNER: NW Sec 1 TWP. 8S. RANGE 27E.

ORIGINAL SURVEY BY: Aaron F. York

CONTRACT NUMBER: 309

CONTRACT DATE: Nov. 18, 1878

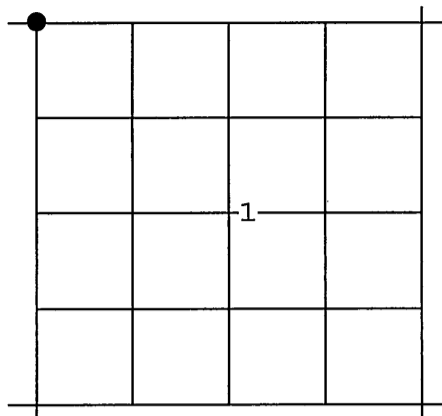

Subsequent retracement by Frank W. Campbell under contract No. 521, dated Jan. 8, 1885.

ORIGINAL DESCRIPTION: Set Stone 12x8x8 for Cor. to Secs. 1, 2, 35, & 36. Raised Stone Mound at Cor.

Campbell's retracement: ...I then run S89°41'W. on a blank line on the S. boundary of Sec. 36 and at 39.97 chs. I found the 1/4 sec. cor. and at 79.92 chs. I found the sec. cor.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
S.D. Follweiler
G.J. Russell
D.E. Mooney

RECEIVED AND
FILED

June 4, 1996
OFFICE OF COUNTY SURVEYOR

Robert D. Bagett

ATTEST: *Steven D. Follweiler*

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett

OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

RENEWAL DATE 12/31/97

April 17, 1996

Grant County Surveyor

EVIDENCE FOUND: Found a basalt stone 13x7x6 marked 7/27 on bottom face 8/27 on the top face, and 5 grooves on the west face and 1 groove on the east face, tipped over to the north on the east side of a mound of stone.

A fence line running east and west is 53 ft. north of corner.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the corner point: I set a 1½"x30" galv. iron pipe, 28" in the ground, with attached Grant County Surveyor brass cap marked as shown.

- From which I SCRIBE NEW BEARING TREES:
- A Juniper 8" diam., bears N69°E, 55.2 ft. marked T7SR27ES36 CSBT.
 - A Juniper 13" diam., bears S68°E, 71.2 ft. marked T8SR27ES1 CSBT.
 - A Juniper 7" diam., bears S58°W, 31.1 ft. marked T8SR27ES2 CSBT.
 - A Pine 11" diam., bears N28°W, 32.9 ft. marked T7SR27ES35 CSBT.

MONUMENT MARKED

GRANT COUNTY
SURVEYOR

T7S R27E
S35 | S36

S2 | S1
T8S

1996
OPLS 598

Buried marked stone south and alongside iron pipe, raised a mound of stone 3 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape, measuring to a 50d nail driven in the sidecenter at the root crown of the BT's. Attached BT tags to BT's.