

CORNER


RESTORATION

CORNER: N1/4 Sec 10 TWP. 8S. RANGE 27E.

ORIGINAL SURVEY BY: Aaron F. York

CONTRACT NUMBER: 309

CONTRACT DATE: Nov. 18, 1878

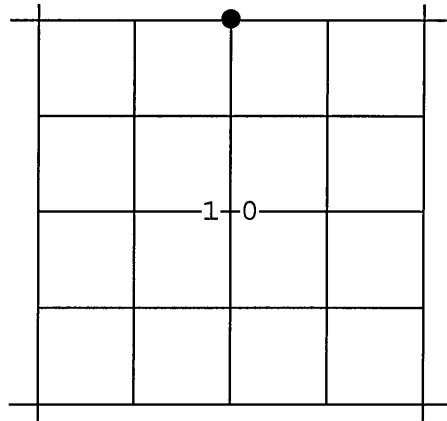

ORIGINAL DESCRIPTION: Set Stone 14x10x6 for 1/4 Sec. Cor. Raised Stone Mound at Cor.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
 S.D. Follweiler
 G.J. Russell
 D.E. Mooney

RECEIVED AND FILED

June 4, 1996
 OFFICE OF COUNTY SURVEYOR

Robert D. Bagett
 ATTEST: *Steven D. Follweiler*

REGISTERED
 PROFESSIONAL
 LAND SURVEYOR

Robert D. Bagett
 OREGON
 JULY 12, 1963
 ROBERT D. BAGETT
 598

RENEWAL DATE 12/31/97

April 17, 1996

Grant County Surveyor

EVIDENCE FOUND: Found a basalt stone 14x12x6 marked 1/4 S on the north face, firmly set in a mound of stone.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the corner point: I set a 1½"x30" galv. iron pipe, 24" in the ground, with attached Grant County Surveyor brass cap marked as shown.

From which I SCRIBE NEW BEARING TREES:
 A Juniper 6" diam., bears N55°E, 98.5 ft. marked 1/4S3 CSBT.
 A Juniper 7" diam., bears S30°E, 40.2 ft. marked 1/4S10 CSBT.
 A Pine 11" diam., bears S43°W, 84.7 ft. marked 1/4S10 CSBT.
 A Juniper 4" diam., bears N29°W, 63.3 ft. marked X CSBT.

MONUMENT MARKED

GRANT COUNTY SURVEYOR

T8S R27E S3

1/4

S10 1996

OPLS 598

Buried marked stone south and alongside iron pipe, raised a mound of stone 3 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape, measuring to a 50d nail driven in the sidecenter at the root crown of the BT's. Attached BT tags to BT's.