


# CORNER RESTORATION

**CORNER:** N1/4 Sec 11 TWP. 8S. RANGE 27E.

**ORIGINAL SURVEY BY:** Aaron F. York

**CONTRACT NUMBER:** 309

**CONTRACT DATE:** Nov. 18, 1878

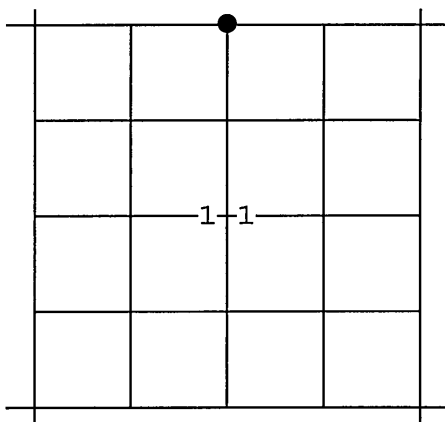

**ORIGINAL DESCRIPTION:** Set Stone 30x14x12 for 1/4 Sec. Cor. Raised Stone Mound at Cor.

**RESTORATION BY, STAMP AND DATE:**

R.D. Bagett  
S.D. Follweiler  
G.J. Russell  
D.E. Mooney

RECEIVED AND  
FILED

*June 4, 1996*  
OFFICE OF COUNTY SURVEYOR

*Robert D. Bagett*  
ATTEST: *Steven D. Follweiler*

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Robert D. Bagett*  
OREGON  
JULY 12, 1963  
ROBERT D. BAGETT  
598

RENEWAL DATE 12/31/97

April 15, 1996

Grant County Surveyor

**EVIDENCE FOUND:** Found a basalt stone 29x12x9 marked 1/4 S on one face, tipped over to north in a dim mound of stone.

**DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:**

Show how trees are scribed and basis of bearings, including compass var.

At the corner point: I set a 1½"x30" galv. iron pipe, 22" in the ground, with attached Grant County Surveyor brass cap marked as shown.

From which I SCRIBE NEW BEARING TREES:

A Pine 15" diam., bears N53°E, 65.3 ft. marked 1/4 S2 CSBT.

A Douglas Fir 8" diam., bears S89°E, 18.1 ft. marked 1/4 S11 CSBT.

A Pine 10" diam., bears S47°W, 29.5 ft. marked 1/4 S11 CSBT.

A Pine 6" diam., bears N50°W, 77.9 ft. marked 1/4 S2 CSBT.

**MONUMENT MARKED**

GRANT COUNTY  
SURVEYOR

T8S R27E  
S2

¼ —————  
S11  
1996  
OPLS 598

Buried marked stone north and alongside iron pipe, raised a mound of stone 3 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape, measuring to a 50d nail driven in the sidecenter at the root crown of the BT's. Attached BT tags to BT's.