


CORNER RESTORATION

CORNER: NW Sec 12 TWP. 8S. RANGE 27E.

ORIGINAL SURVEY BY: Aaron F. York

CONTRACT NUMBER: 309

CONTRACT DATE: Nov. 18, 1878

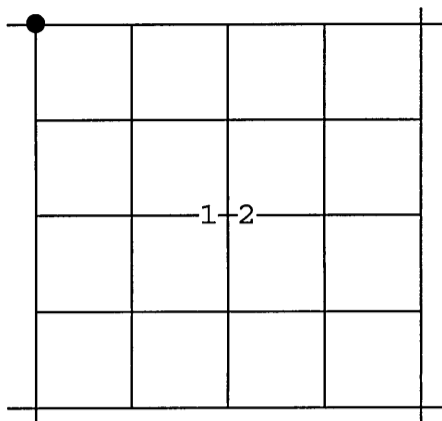

ORIGINAL DESCRIPTION: Set Stone 18x18x6 for Cor. to Secs. 1, 2, 11, and 12.

From Which:

- A Yellow Pine 6 in. in dia. bears N65°W, 50 lks. dist.
- A Pine 8 in. in dia. bears N1°E, 78 lks. dist.
- A Pine 36 in. in dia. bears S85°E, 20 lks. dist.
- A Pine 5 in. in dia. bears S60°W, 74 lks. dist.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
S.D. Follweiler
G.J. Russell
D.E. Mooney

RECEIVED AND
FILED

June 7, 1996
OFFICE OF COUNTY SURVEYOR

Robert D. Bagett
ATTEST: *Steven D. Follweiler*

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett
OREGON
JULY 12, 1963
ROBERT D. BAGETT
598
RENEWAL DATE 12/31/97

April 15, 1996

See Record Map of Survey No. 1411

EVIDENCE FOUND: After a diligent search I found no evidence of the original corner stone. I accept a corner of fences bearing North, East, and Westerly. This position is harmoniously related to existing original corners and has long been recognized as the corner by adjacent land owners and is accepted as the best available evidence of the position of the original corner.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:
Show how trees are scribed and basis of bearings, including compass var.

At the corner point: I set a 2½"x30" alum. pipe, 30" in the ground, with attached Bagett - Griffith & Blackman alum. cap marked as shown.

From which I SCRIBE NEW BEARING TREES:
A Pine 6" diam., bears S72°W, 82.5 ft. marked X BT.
A Juniper 7" diam., bears N02°W, 104.9 ft. marked T8SR27ES2 BT.

Also: I SET NEW REFERENCE POINTS:
A 5/8"x30" iron pin, bears S87°E, 24.00 ft., with attached alum. cap marked BGB SURVEY MARKER RP 1 1996 OPLS 598.
A 5/8"x30" iron pin, bears S09°W, 16.03 ft., with attached alum. cap marked BGB SURVEY MARKER RP 2 1996 OPLS 598.

MONUMENT MARKED

BAGETT-GRIFFITH
AND BLACKMAN

T8S	R27E
S2	S1
S11	S12
	1996
	OPLS 598

Raised a mound of stone 2 ft. base to top of cap. Used true bearings, (solar observation), and electronic distance measuring device, measuring to a 50d nail driven in the sidecenter at the root crown of the BT's. Attached BT tags to BT's.