

# CORNER RESTORATION


**CORNER:** SW Sec 12 TWP. 8S. RANGE 27E.

**ORIGINAL SURVEY BY:** Aaron F. York

**CONTRACT NUMBER:** 309

**CONTRACT DATE:** Nov. 18, 1878

Subsequent retracement by Vernon Glaze, Grant County Surveyor, dated May 24, 1913, recorded in Surveyor's Record Book 1 Page 72.

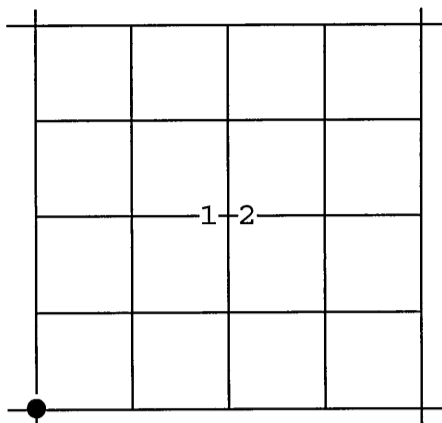

**ORIGINAL DESCRIPTION:** Set Stone 22x12x6 for Cor. to Secs. 11, 12, 13, and 14. Raised Stone Mound at Cor.

From which:

A House bears S70°W. about 6 chs. dist.

A Corral bears S40°E. 50 lks. dist.

Glaze declares this corner missing.

Glaze's Record: Set NE cor. 14 from which a yellow pine 5" in diam. bears S 146.0 set rock 4 notches S. 1 notch E C.S.

**RESTORATION BY, STAMP AND DATE:**

R.D. Bagett  
S.D. Follweiler  
G.J. Russell  
D.E. Mooney

RECEIVED AND  
FILED

*June 11, 1996*  
OFFICE OF COUNTY SURVEYOR

*Robert D. Bagett*  
ATTEST: *Steven D. Follweiler*

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Robert D. Bagett*  
OREGON  
JULY 12, 1963  
ROBERT D. BAGETT  
598  
RENEWAL DATE 12/31/97

April 11, 1996

Grant County Surveyor

**EVIDENCE FOUND:** Found a basalt stone 22x12x11 firmly set in a mound of stone, no definite marks remain, parts of this stone have been broken off.

From which:

An unrecorded Juniper 13" diam., bears S74°E, 14.2 ft.

with partially healed blaze, scribing visible.

I accept this stone as the corner set by Glaze.

**DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:**

Show how trees are scribed and basis of bearings, including compass var.

At the corner point: I set a 1½"x20" galv. iron pipe, 12" in the ground, with attached Grant County Surveyor brass cap marked as shown.

From which I SCRIBE NEW BEARING TREES:

A Juniper 14" diam., bears N72°E, 126.6 ft.

marked T8SR27ES12 CSBT.

A Juniper 11" diam., bears S54°E, 59.6 ft.

marked T8SR27ES13 CSBT.

A Juniper 11" diam., bears S45°W, 46.4 ft.

marked T8SR27ES14 CSBT.

A Juniper 14" diam., bears N58°W, 190.3 ft.

marked T8SR27ES11 CSBT.

**MONUMENT MARKED**

GRANT COUNTY  
SURVEYOR

T8S R27E

S11	S12
-----	-----

S14	S13
-----	-----

1996

OPLS 598

Placed marked stone east and alongside iron pipe in mound of stone, raised a mound of stone 3 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape, measuring to a 50d nail driven in the sidecenter at the root crown of the BT's. Attached BT tags to BT's.