

RECEIVED & FILED

FEB 26 1973
JOHN LIVEIRA, County Clerk

CORNER RESTORATION


By _____ Deputy

East $\frac{1}{4}$ cor.
CORNER Sec. 36 TWP 8 S., RANGE 27 E., W.M.

ORIGINAL SURVEY BY: Aaron S. York

CONTRACT NUMBER: 335

CONTRACT DATE: August 11, 1879

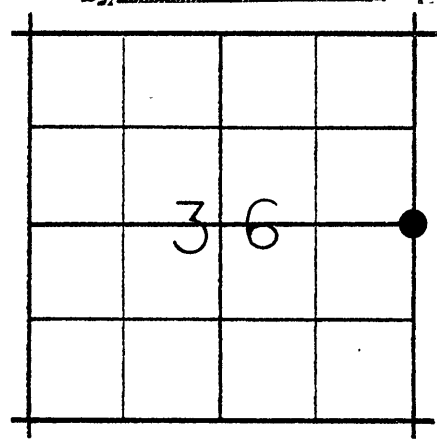

ORIGINAL DESCRIPTION:

Begin at Standard Cor. to Townships 8 and 9 South Ranges 27 and 28 East W.M. Oregon

North on Range line on East boundary of sec. 36.

30.00 A spring 1 lks. wide runs W.

40.00 Set stone 16x14x8 for $\frac{1}{4}$ Sec. cor.
Raised a mound of stone at Cor.

RESTORATION BY, STAMP AND DATE:

REGISTERED PROFESSIONAL LAND SURVEYOR

Robert D. Baggett
OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

February 10, 1973

EVIDENCE FOUND: Found a basalt stone 17x13x8 ins. marked $\frac{1}{4}$ on West side, firmly set in a mound of stone.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the corner point, set a 1 $\frac{1}{2}$ x30 inch iron pipe 8" in the ground with brass cap marked as shown. from which NEW BEARING TREES:

A juniper 7 ins. diam., bears N.47°E., 111.3 ft., MONUMENT MARKED scribed $\frac{1}{4}$ S31 CS BT.

A 12 inch juniper bears N.47°W., 89.8 ft., scribed $\frac{1}{4}$ S36 CS BT.

I placed the original $\frac{1}{4}$ cor. stone west and along side the iron pipe, and raised a mound of stone 4 ft base to top of pipe.

Used steel tape and compass with 20°E. var. Complete and File with Office of the Grant

County Surveyor, Grant County, Oregon, Measurements are taken to the face of the Courthouse, Canyon City, Oregon 97820 blaze on the BTs.

