


CORNER RESTORATION

CORNER: SE Sec: 33 TWP: 8S. RANGE: 27E.

ORIGINAL SURVEY BY: Aaron F. York

CONTRACT NUMBER: 309

CONTRACT DATE: Nov. 18, 1878
Subsequently remonumented by R.D. Bagett,
County Surveyor in 1971.

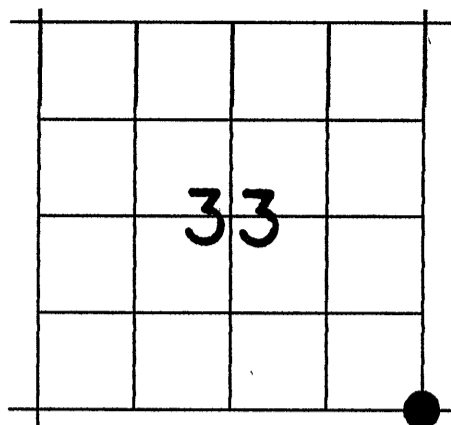

ORIGINAL DESCRIPTION: 80.00 chs. Set stone 16x12x10 for Standard Cor. to secs. 33 and 34.

I found original stone in 1971. My record states:
set a 1½"x36" iron pipe with brass cap, 15" in ground and raised a mound
of stone to top of cap.

- From which:
- A Juniper 8" diam., bears N83°E, 56.2 ft.
marked T8SR27ES34 SC BT.
 - A Juniper 10" diam., bears N39°W, 52.7 ft.
marked T8SR27ES33 SC BT.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
S.D. Follweiler
N.I. Fowle

RECEIVED AND
FILED
AUG 26 1992
OFFICE OF COUNTY SURVEYOR
Attest: *[Signature]*

REGISTERED
PROFESSIONAL
LAND SURVEYOR
[Signature]
OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

July 14, 1992

Grant County Surveyor

EVIDENCE FOUND: A 1½"x36" iron pipe 15" in the ground, with brass cap marked as shown.

- From which:
- A Juniper 12" diam., bears N86°E, 56.2 ft.
Scribing visible.
 - A Juniper 14" diam., bears N39°W, 52.7 ft.
Scribing visible.

GRANT COUNTY
SURVEYOR
SC
T8S | R27E
S33 | S34
S5
T9S
1971
LS 598

See Map of Survey Number 1219.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:
Show how trees are scribed and basis of bearings, including compass var.

ALSO I SET NEW REFERENCE POINTS:

- A 5/8"x30" iron pin bears S45°E, 25.0 ft. with attached aluminum cap marked Grant County Surveyor R.P. 1 1992 OPLS 598.
- A 5/8"x30" iron pin bears S45°W, 25.0 ft. with attached aluminum cap marked Grant County Surveyor R.P. 2 1992 OPLS 598.

Used mag. compass with 20°E var. and a steel tape.