

CORNER RESTORATION


CORNER: NW Sec 6 TWP 8S. RANGE 28E.

ORIGINAL SURVEY BY: A.F. York

CONTRACT NUMBER: 309

CONTRACT DATE: Nov. 18, 1878

Subsequent retracement by Henry Meldrum under contract No. 380 dated Mar. 19, 1881.

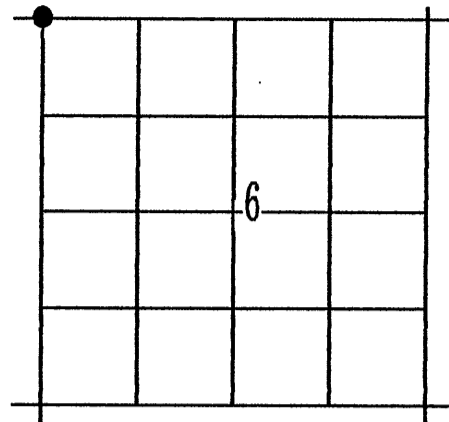

ORIGINAL DESCRIPTION: Set stone 24x18x18 for cor. to Townships 7 and 8 South Ranges 27 and 28 East. Raised stone mound at cor.

Retracement by Meldrum: 81.38 Ch. to a point 64 lks. W. of cor. to T.7 & 8 S. Rgs. 27 & 28 E.



RESTORATION BY, STAMP AND DATE:

R.D. Bagett
J.L. Watson
S.D. Follweiler
G.J. Russell

RECEIVED AND
FILED

APRIL 21, 1995
OFFICE OF COUNTY SURVEYOR

Robert D. Bagett
ATTEST: *Steven D. Follweiler*



Renewal Date 12/31/95

April 4, 1995

Grant County Surveyor

EVIDENCE FOUND: Found a basalt stone 17"x12"x12" set in a ring of stones 3 feet south of a mound of stones. Stone is marked 8/27 on one face, 8/28 on other face, and 7/28 on other face. Could find no markings on the fourth face.

from which:

An unrecorded BT: A Juniper 16"diam., bears N89°W, 60.0 ft. marked T8SR27 S1.

Corner is 60' east of fence running North and South.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the corner point: I set a 1½"x30" galv. iron pipe, 10" in the ground, with attached Grant County Surveyor brass cap marked as shown.

From which I SCRIBE NEW BEARING TREES:

A Juniper 16"diam., bears N47°E, 123.4 ft. marked T7SR28ES31 CSBT.

A Juniper 9"diam., bears S73°E, 176.7 ft. marked T8SR28ES6 CSBT.

A Juniper 20"diam., bears N60°W, 133.3 ft. marked T7SR27ES36 CSBT.

Also: I SET A NEW REFERENCE POINT:

A 5/8"x30" iron pin, bears S63°W, 18.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 1 1995 OPLS 598.

MONUMENT MARKED

GRANT COUNTY
SURVEYOR

T7S
R27E R28E
S36 | S31

S1 | S6
T8S
1995
OPLS 598

Buried marked stone south and alongside iron pipe, raised a mound of stone 6 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape, measuring to a 50d nail driven in the sidecenter at the root crown of the BT's. Attached BT tags to BT's.