

CORNER


RESTORATION

CORNER: N1/4 Sec 6 TWP. 8 S. RANGE 28E.

ORIGINAL SURVEY BY: Henry Meldrum

CONTRACT NUMBER: 380

CONTRACT DATE: March 19, 1881

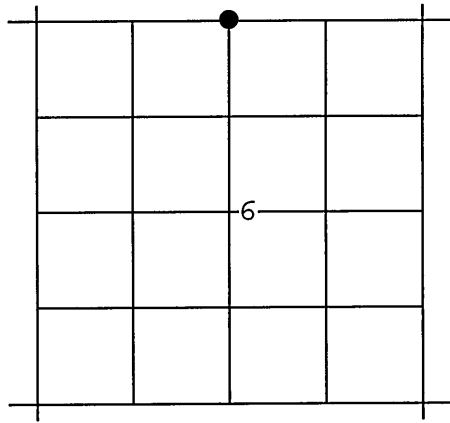

ORIGINAL DESCRIPTION: Set a basalt stone 24x12x5 in a mound of stone for 1/4 sec. cor.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
S.D. Follweiler
D.E. Mooney
J.W. Russell

RECEIVED AND
FILED

OCT 10, 1995
OFFICE OF COUNTY SURVEYOR

Robert D. Bagett

ATTEST: *Jerry Russell*

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett

OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

Renewal Date 12/31/95

Sept. 22, 1995

EVIDENCE FOUND: After a diligent search I found no evidence of the original corner. I declare this corner lost and establish its position at single proportionate measure between the found northwest corner of section 6 and the proportioned northeast corner of section 6.

See Record Map of Survey No. 1382.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the corner point: I set a 1½"x30" galv. iron pipe, 20" in the ground, with attached brass cap marked as shown, from which:

I SCRIBE A NEW BEARING TREE:

A Juniper 17" diam., bears N85°W, 166.6 ft. marked 1/4 S31 BT.

MONUMENT MARKED

I SET NEW BEARING OBJECTS:

A 2½" cross chiseled in the SW face of a 12' high rim approximately 1.5' above the base, bears N.54°E., 32.77 ft., marked + BO.

T7S R28E

S31

¼ —————

S6

T8S

1995

OPLS 598

I SET NEW REFERENCE POINTS:

A 5/8"x30" iron pin, bears S85°E, 25.00 ft., with attached alum. cap marked BGB SURVEY MARKER RP 1 1995 OPLS 598.

A 5/8"x30" iron pin, bears S54°W, 25.00 ft., with attached alum. cap marked BGB SURVEY MARKER RP 2 1995 OPLS 598.

Raised a mound of stone 3 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape, measuring to a 50d nail driven in the sidecenter at the root crown of the BT. Attached BT tag to BT.