


CORNER RESTORATION

CORNER: NE Sec 6 TWP. 8 S. RANGE 28E.

ORIGINAL SURVEY BY: Henry Meldrum

CONTRACT NUMBER: 380

CONTRACT DATE: March 19, 1881

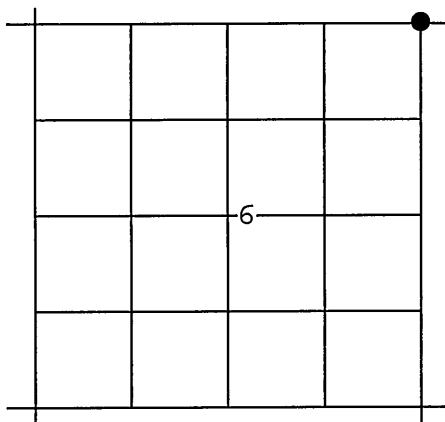

ORIGINAL DESCRIPTION: Set a basalt stone 18x16x7 in a mound of stone for sec. cor. to secs. 5, 6, 31, 32.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
S.D. Follweiler
D.E. Mooney
J.W. Russell

RECEIVED AND
FILED

Oct. 10, 1995
OFFICE OF COUNTY SURVEYOR

Robert D. Bagett

ATTEST: *Jeremy Russell*

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett

OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

Renewal Date 12/31/95

Sept. 26, 1995

EVIDENCE FOUND: After a diligent search I found no evidence of the original corner. I declare this corner lost and establish its position at single proportionate measure between the found northwest corner of section 6 and the top of the cliff called for in the GLO notes near the northeast corner of section 5.

See Record Map of Survey No. 1382.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the corner point: I set a 1½"x30" galv. iron pipe, 24" in the ground, with attached brass cap marked as shown, from which:

I SCRIBE NEW BEARING TREES:

A Juniper 30" diam., bears S9°W, 75.1 ft. marked T8SR28E S6 BT.

A Juniper 20" diam., bears N63°W, 80.0 ft. marked T7SR28E S31 BT.

I SET NEW BEARING OBJECTS:

A 2½" cross chiseled in the face of a 6' high rim approximately 3' above the base, bears N.41°E., 1.73 ft., marked + BO.

A 2½" cross chiseled in the face of a 6' high rim approximately 10" above the base, bears S.49°E., 5.05 ft., marked + BO.

MONUMENT MARKED

T7S R28E	
	¼
S31	S32
S6	S5
	T8S
	1995
	OPLS 598

Raised a mound of stone 5 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape, measuring to a 50d nail driven in the sidecenter at the root crown of the BT's. Attached BT tags to BT's.