

CORNER


RESTORATION

CORNER: E1/4 Sec 6 TWP. 8 S. RANGE 28E.

ORIGINAL SURVEY BY: Henry Meldrum

CONTRACT NUMBER: 380

CONTRACT DATE: March 19, 1881

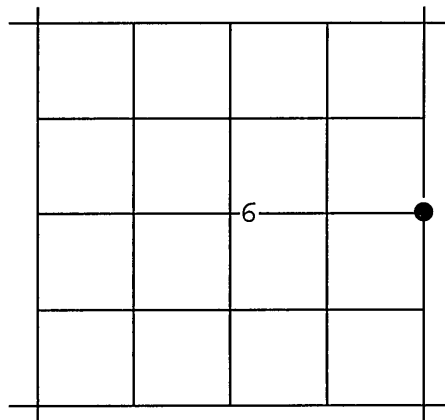

ORIGINAL DESCRIPTION: Set a basalt stone 18x14x12 in a mound of stone 1/4 sec. cor.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
 S.D. Follweiler
 D.E. Mooney
 J.W. Russell

RECEIVED AND FILED

Oct 10, 1995

OFFICE OF COUNTY SURVEYOR

Robert D. Bagett

ATTEST: *Jerry Russell*

REGISTERED
 PROFESSIONAL
 LAND SURVEYOR

Robert D. Bagett
 OREGON
 JULY 12, 1963
 ROBERT D. BAGETT
 598

Renewal Date 12/31/95

Sept. 22, 1995

EVIDENCE FOUND: After a diligent search I found no evidence of the original corner. I declare this corner lost and establish its position at single proportionate measure between the found southeast corner of section 6 and the proportioned northeast corner of section 6.

See Record Map of Survey No. 1382.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the corner point: I set a 1½"x30" galv. iron pipe, 26" in the ground, with attached brass cap marked as shown, from which:

I SCRIBE NEW BEARING TREES:

A Juniper 8" diam., bears S57°W, 80.6 ft. marked 1/4 S6 BT.

A double-trunk Juniper 13" diam., bears N55°W, 29.4 ft. marked 1/4 S6 BT.

I MARK NEW BEARING OBJECTS:

A 3" cross chiseled in the face of a 10' high rim 3.5' above the base, bears N.26°E., 25.92 ft., marked + BO.

A 2" cross chiseled in the face of a 12' high rim 1' above the base, bears S.31°E., 4.95 ft., marked + BO.

MONUMENT MARKED

T8S R28E

¼

S6 | S5

1995

OPLS 598

Raised a mound of stone 2 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape, measuring to a 50d nail driven in the sidecenter at the root crown of the BT's. Attached BT tags to BT's.