

# CORNER RESTORATION


CORNER: SW Sec 6 TWP 8S. RANGE 28E.

ORIGINAL SURVEY BY: A.F. York

CONTRACT NUMBER: 309

CONTRACT DATE: Nov. 18, 1878

Subsequent retracement by Henry Meldrum under contract No. 380 dated Mar. 19, 1881.

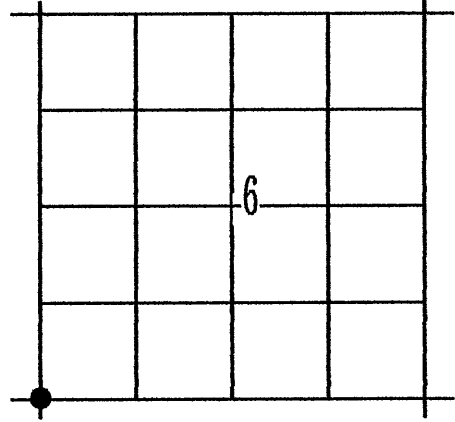

ORIGINAL DESCRIPTION: Set stone 14x10x9 for cor. to secs. 1, 12, 6, and 7. Raised stone mound at cor.

Retracement by Henry Meldrum: 75.40 Ch. to a point 54 lks. E. of cor. to secs. 6 & 7.

**RESTORATION BY, STAMP AND DATE:**

R.D. Bagett  
J.L. Watson  
G.J. Russell  
S.D. Follweiler

RECEIVED AND  
FILED

*APRIL 21, 1995*  
OFFICE OF COUNTY SURVEYOR

*Robert D. Bagett*

ATTEST: *Steven D. Follweiler*

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Robert D. Bagett*  
OREGON  
JULY 12, 1883  
ROBERT D. BAGETT  
598

Renewal Date 12/31/95

April 4, 1995

Grant County Surveyor

EVIDENCE FOUND: Found a basalt stone 12"x9"x4" in a rockjack at corner of fences running East and South, with an old fenceline going North. A newer fence from the North joins the east - west fence approximately 50' east of section corner. Stone is marked 8/27 on one face, 8/28 on opposite face, 1 groove on one edge, and 5 notches on opposite edge. Found a Forest Service K - tag at fence corner. Tag is marked: Moore 7-17-45 and 12-50, 75 Ch S to Cor 12-13. I accept this stone for the position of the Section corner.

**DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:**

Show how trees are scribed and basis of bearings, including compass var.

At the corner point: I set a 1½"x30" galv. iron pipe to bedrock with a 90° bend in pipe 15" from top of cap. Cap projects 4" above ground with attached Grant County Surveyor brass cap marked as shown.

From which I SCRIBE NEW BEARING TREES:

- A Juniper 12"diam., bears N13°E, 74.5 ft. marked T8SR28ES6 CSBT.
- A Juniper 13"diam., bears S35°E, 82.5 ft. marked T8SR28ES7 CSBT.
- A Juniper 20"diam., bears S55°W, 185.6 ft. marked T8SR27ES12 CSBT.
- A Juniper 13"diam., bears N35°W, 69.8 ft. marked T8SR27ES1 CSBT.

**MONUMENT MARKED**

GRANT COUNTY  
SURVEYOR  
T8S  
R27E R28E  
S1 | S6  
-----  
S12 | S7  
1995  
OPLS 598

Buried marked stone north and alongside iron pipe, raised a mound of stone 3 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape, measuring to a 50d nail driven in the sidecenter at the root crown of the BT's. Attached BT tags to BT's.