


CORNER RESTORATION

CORNER: S1/4 Sec 6 TWP. 8 S. RANGE 28E.

ORIGINAL SURVEY BY: Henry Meldrum

CONTRACT NUMBER: 380

CONTRACT DATE: March 19, 1881

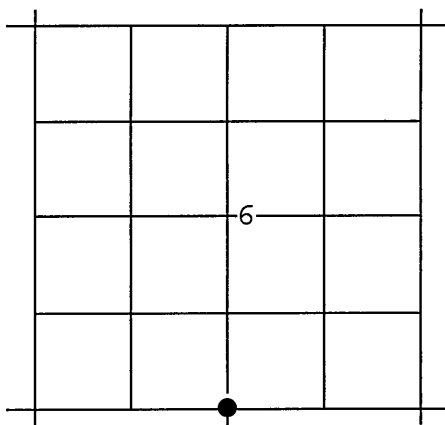

ORIGINAL DESCRIPTION: Set a basalt stone 14x12x5 in a mound of stone for 1/4 Sec. Cor.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
S.D. Follweiler
D.E. Mooney
J.W. Russell

RECEIVED AND
FILED

Oct. 10, 1995

OFFICE OF COUNTY SURVEYOR

Robert D. Bagett

ATTEST:

Jeremy Russell

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett

OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

Renewal Date 12/31/95

Sept 22, 1995

EVIDENCE FOUND: After a diligent search I found no evidence of the original corner. I declare this corner lost and establish its position at single proportionate measure between the Found southeast and southwest corners of section 6.

See Record Map of Survey No. 1382.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the corner point: I set a 1½"x30" galv. iron pipe, 40" in the ground, with attached brass cap marked as shown.

From which: I SET NEW REFERENCE POINTS:

A 5/8"x30" iron pin, bears N45°E, 53.00 ft., with attached alum. cap marked BGB SURVEY MARKER RP 1 1995 OPLS 598. (Set in N-S fenceline).

A 5/8"x30" iron pin, bears S45°E, 42.00 ft., with attached alum. cap marked BGB SURVEY MARKER RP 2 1995 OPLS 598. (Set in N-S fenceline).

A 5/8"x30" iron pin, bears S45°W, 25.00 ft., with attached alum. cap marked BGB SURVEY MARKER RP 3 1995 OPLS 598.

A 5/8"x30" iron pin, bears N45°W, 25.00 ft., with attached alum. cap marked BGB SURVEY MARKER RP 4 1995 OPLS 598.

MONUMENT MARKED

T8S R28E
S6

¼ —————
S7

1995
OPLS 598

Raised a mound of stone 2 ft. base. Used mag. compass with 20°E var. and a steel tape, measuring to a 50d nail driven in the sidecenter at the root crown of the BT's. Attached BT tags to BT's.