

CORNER


RESTORATION

CORNER: NE Sec 7 TWP 8S. RANGE 28E.

ORIGINAL SURVEY BY: Henry Meldrum

CONTRACT NUMBER: 380

CONTRACT DATE: March 19, 1881

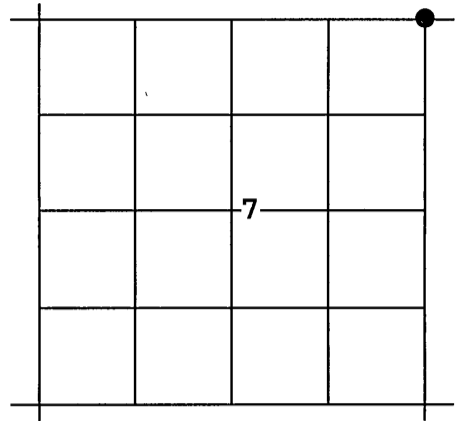

ORIGINAL DESCRIPTION: Set a basalt stone 12x12x6 in a mound of stone for cor. to sec's. 5, 6, 7, 8.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
S.D. Follweiler
D.E. Mooney
J.W. Russell

RECEIVED AND
FILED

Aug 23, 1995
OFFICE OF COUNTY SURVEYOR

Robert D. Bagett

ATTEST: *Jerry Russell*

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett
OREGON
JULY 12, 1983
ROBERT D. BAGETT
598

Renewal Date 12/31/95

August 23, 1995

Grant County Surveyor

EVIDENCE FOUND: Found a basalt stone 12x12x7 loosely set at northeast edge of an old mound of stone. Marked with 5 grooves on one face and 5 grooves on an adjacent face.

**DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:
Show how trees are scribed and basis of bearings, including compass var.**

At the corner point: I set a 1½"x26" galv. iron pipe, 12" in the ground, with attached Grant County Surveyor brass cap marked as shown.

From which: I SCRIBE NEW BEARING TREES:

A Juniper 12" diam., bears N34°E, 156.3 ft. marked S5 T8SR28E CSBT.

A Juniper 13" diam., bears S38°E, 235.1 ft. marked S8 T8SR28E CSBT.

A Juniper 17" diam., bears S44°W, 138.8 ft. marked S7 T8SR28E CSBT.

A Juniper 7" diam., bears N6°W, 155.5 ft. marked S6 T8SR28E CSBT.

MONUMENT MARKED

GRANT COUNTY
SURVEYOR

T8S R28E
S6 S5
S7 S8

1995
OPLS 598

Buried marked stone North and alongside iron pipe, raised a mound of stone 4 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape, measuring to a 50d nail driven in the sidecenter at the root crown of the BT's. Attached BT tags to BT's.