

CORNER RESTORATION


CORNER: W1/4 Sec 7 TWP 8S. RANGE 28E.

ORIGINAL SURVEY BY: A.F. York

CONTRACT NUMBER: 309

CONTRACT DATE: Nov. 18, 1878

Subsequent retracement by Henry Meldrum under contract No. 380 dated Mar. 19, 1881.

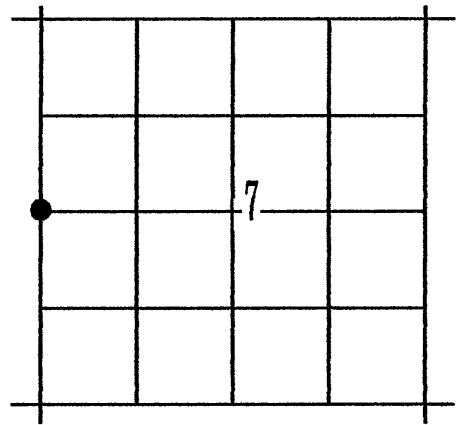

ORIGINAL DESCRIPTION: Set stone 18x15x8 for 1/4 sec. cor. Raised stone mound at cor.

Retracement by Henry Meldrum: 45.95 Ch. to a point 42 lks. E. of 1/4 sec. cor.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
J.L. Watson
G.J. Russell
S.D. Follweiler

RECEIVED AND
FILED

APRIL 21, 1995
OFFICE OF COUNTY SURVEYOR

Robert D. Bagett
ATTEST: *Steven D. Follweiler*

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett
OREGON
JULY 12, 1983
ROBERT D. BAGETT
598
Renewal Date 12/31/95

April 4, 1995

Grant County Surveyor

EVIDENCE FOUND: Found a basalt stone 13"x11"x6" marked 1/4 on one face, set in a semi-circle ring of stones. Stone is fractured on the marked face.

Corner is 10' west of fence running North and South.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:
Show how trees are scribed and basis of bearings, including compass var.

At the corner point: I set a 1/2"x3" brass stem, grouted 3" in bedrock 6" below ground level, with attached Grant County Surveyor brass cap marked as shown.

From which I SCRIBE A NEW BEARING TREE:
A Juniper 12"diam., bears N32°E, 140.9 ft. marked 1/4S7 CSBT.

Also: I SET NEW REFERENCE POINTS:

A 5/8"x30" iron pin, bears S55°E, 27.10 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 1 1995 OPLS 598.

A 5/8"x30" iron pin, bears S71°W, 26.30 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 2 1995 OPLS 598.

A 5/8"x30" iron pin, bears N45°W, 84.90 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 3 1995 OPLS 598.

MONUMENT MARKED

GRANT COUNTY
SURVEYOR
T8S
R27E R28E
1/4
S12 | S7
1995
OPLS 598

Placed marked stone in rock mound east and alongside iron pipe, raised a mound of stone 3 ft. base, east and alongside cap. Used mag. compass with 20°E var. and a steel tape, measuring to a 50d nail driven in the sidecenter at the root crown of the BT. Attached BT tag to BT.