

CORNER


RESTORATION

CORNER: SE Sec 7 TWP 8S. RANGE 28E.

ORIGINAL SURVEY BY: Henry Meldrum

CONTRACT NUMBER: 380

CONTRACT DATE: March 19, 1881

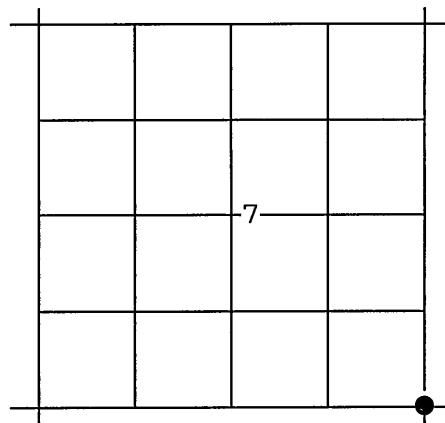

ORIGINAL DESCRIPTION: Set a basalt stone 24x22x4 in a mound of stone for cor. to sec's. 7, 8, 17, and 18 from which a Pine 36 in. in dia. bears N.17°W. 66 lks. dist.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
S.D. Follweiler
D.E. Mooney
J.W. Russell

RECEIVED AND
FILED

OCT. 5, 1995
OFFICE OF COUNTY SURVEYOR

Robert D. Bagett

ATTEST: *Jerry Russell*

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett
OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

Renewal Date 12/31/95

August 23, 1995

Grant County Surveyor

EVIDENCE FOUND: I found the original bearing tree, which is now a badly decayed, blowdown pine, 48" diam., I found no definite scribing. We did not find the original corner stone, it may have moved down the steep slope during a waterspout. We found a BLM K tag dated 8/14/52, attached to a steel fence post 3 feet east of corner position. Corner position fits GLO cliff calls south and east, and is harmoniously related to other known corners in the area.

I set the corner at record bearing (S17°E) and distance (43.56 feet) from the original bearing tree, if the tree were standing.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED: Show how trees are scribed and basis of bearings, including compass var.

At the corner point: I set a 1½"x30" galv. iron pipe, 26" in the ground, with attached Grant County Surveyor brass cap marked as shown, from which:

I SET A NEW REFERENCE POINT:
A 5/8"x30" iron pin, bears N54°E, 50.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 1 1995 OPLS 598.

I SET NEW BEARING OBJECTS:
A 3" cross chiseled in the north face of a 20 ft. cliff bears S54°E, 2.03 ft., marked + BO.
A 3" cross chiseled in the north face of a 20 ft. cliff bears S9°W, 1.73 ft., marked + BO.

I SCRIBE A NEW BEARING TREE:
A Ponderosa Pine 11"diam., bears N36°W, 30.9 ft. marked S7 T8SR28E CSBT.

MONUMENT MARKED

GRANT COUNTY
SURVEYOR

T8S R28E
S7 | S8

S18 | S17

1995
OPLS 598

Raised a mound of stone 3 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape, measuring to a 50d nail driven in the side center at the root crown of the BT. Attached BT tag to BT.