

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**


**History of original corner establishment:**

Original corner established by: Aaron York , Deputy Surveyor, under Contract No. 309, dated Nov. 18, 1878.

Surveyor General Record States: Set stone 16x10x6 for corner to sections 25, 36, 30 & 31.


Re-Survey by: Henry Meldrum, Deputy Surveyor, under Contract No. 380, dated March 19, 1881.

Surveyor General Record States: Point 44 lks east of corner to sections 30 & 31.

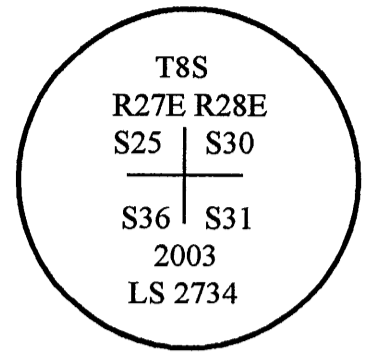

**Description of corner evidence found:**

No evidence of the original corner was found.

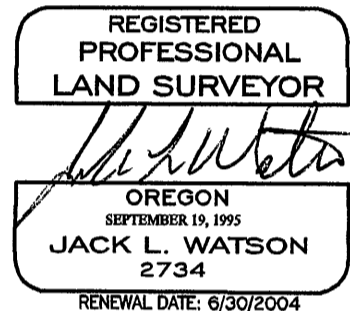

See Map of Survey No. 1663

**Description of monument and accessories set at corner location:**

At the point determined by survey, I set a 2½"x30" aluminum pipe with attached 3" aluminum cap, 30 inches in the ground, surrounded by a mound of stone. The cap is stamped as shown in the diagram.

From which:

A 18" juniper bears N9°E, 65.3 ft. marked T8SR28ES30BT.

A 6" juniper bears S73°W, 63.2 ft. marked XBT.

A 10" juniper bears N37°W, 36.1 ft. marked T8SR27ES25BT.

A 5/8"x24" iron pin bears S62°E, 10.72 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's and magnetic compass, with 18° E. declination.

Date: April 15, 2003

Office of SURVEYOR County of GRANT  
 State of OREGON, I hereby certify that the within instrument was filed in this office  
 for record on the 2nd day of MAY, 2003.  
Robert D. Baggett by \_\_\_\_\_  
 (COUNTY OFFICIAL) (DEPUTY)