


# CORNER RESTORATION

N  $\frac{1}{4}$  cor.  
**CORNER** Sec. 35 **TWP** 8 S. **RANGE** 28 E.


**ORIGINAL SURVEY BY:** Henry Meldrum  
**CONTRACT NUMBER:** 380  
**CONTRACT DATE:** March 19, 1881

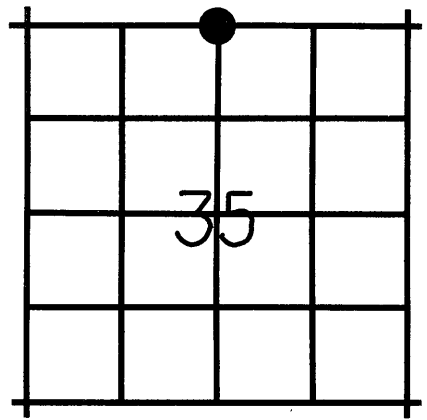


**ORIGINAL DESCRIPTION:** S. 89° 39' W., on a true line between Secs. 26 and 35. 40.16 chs. set a basalt stone 22x16x10 in a mound of stone for  $\frac{1}{4}$  sec. cor.

**RESTORATION BY, STAMP AND DATE:**

R. D. Bagett  
 J. L. Watson  
 J. L. Meyerholz



*Robert D. Bagett*



June 23, 1984

Grant County Surveyor

**EVIDENCE FOUND:**

Found original basalt corner stone 22x16x10 inches, marked  $\frac{1}{4}$  on N. face, (stone had tipped over on marked face), set in a ring of stone.

**RECEIVED AND FILED**

JUN 27 1984

OFFICE OF COUNTY SURVEYOR

*Robert D. Bagett*  
 Attest: *Annice Lawrence*

**DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:**

Show how trees are scribed and basis of bearings, including compass var.

At the corner point: Set a 1 $\frac{1}{2}$ "x30" galvanized iron pipe, 18 inches in the ground with brass cap marked as shown, from which I scribe NEW BEARING TREES:

A Juniper 16" diam., bears N. 76° E., 34.2 ft., mkd. T8SR28E  $\frac{1}{4}$ S26 CSBT.

A Juniper 7" diam., bears South 28.4 ft., mkd. T8SR28E  $\frac{1}{4}$ S35 CSBT.

Buried corner stone East and inverted alongside the iron pipe and surrounded pipe with a mound of stone, 4 ft. base to top of cap.

Used magnetic compass and steel tape, measuring to head of a 40d nail driven flush with the BT blaze at root crown of bearing trees.

Attached Grant County Surveyor BT tags to BTs and painted blazes with red timber marking paint.

**MONUMENT MARKED**

