


## CORNER RESTORATION

SE Cor. Sec 25  
 CORNER \_\_\_\_\_ TWP 8 S., RANGE 30 E., W.M.

ORIGINAL SURVEY BY: Frank W. Campbell

CONTRACT NUMBER: 380

CONTRACT DATE: March 19, 1881

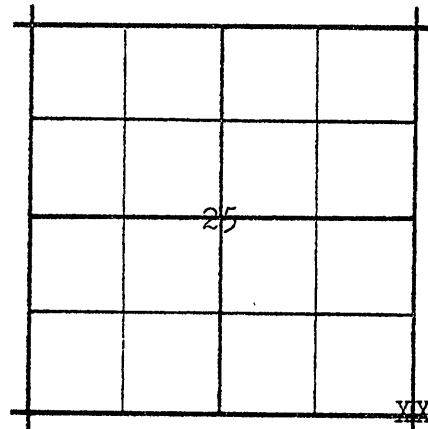

**ORIGINAL DESCRIPTION:**

Set a basalt stone 15x12x4 and dug pits for cor. to secs. 25,30,31, & 36.

**RESTORATION BY, STAMP AND DATE:**

Bagett & Griffith Surveying  
 John Day, Oregon  
 April 10, 1970



**EVIDENCE FOUND:**

Found a marked basalt stone 15x12x4 ins.

**DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:**

Show how trees are scribed and basis of bearings, including compass var.  
 Set a 1"x30" iron pipe 15 inches in the ground with brass cap mkd as shown.  
 Raised a mound of stone around iron pipe. FROM WHICH: MONUMENT MARKED  
 A Juniper 24 ins. diam., bears S59°E., 39.4 ft., mkd. T8S R30E S31 BT.

A juniper, 16 ins. diam., bears S.82°W., 60.5 feet., mkd. T8S R30E S36 BT.

A juniper 12 ins. diam., bears N50°W., 69.5 ft., mkd. T8S R30E S25 BT.

A juniper 18 ins. diam., bears N34°E., 33.0 ft., mkd. T8S R31E S30 BT.

Complete and File with Office of the Grant County Surveyor, Grant County, Oregon,  
 Courthouse, Canyon City, Oregon 97820

Chain & Compass  
 Var. 20°E.

