


## CORNER RESTORATION

NW cor. sec. 24  
 CORNER \_\_\_\_\_ TWP 8 S., RANGE 30 E., W.M.

ORIGINAL SURVEY BY: F.W. Campbell

CONTRACT NUMBER: 380

CONTRACT DATE: March 19, 1881

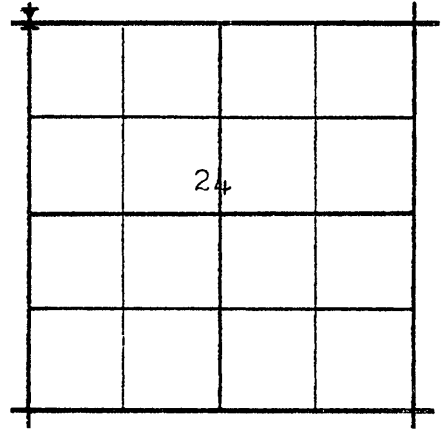

**ORIGINAL DESCRIPTION:**

Set a basalt stone 14x8x5 and dug pits for cor to secs.13,14,23, & 24.

**RESTORATION BY, STAMP AND DATE:**

Bagett & Griffith Surveying  
 John Day, Oregon

April 11, 1970



**EVIDENCE FOUND:**

Basalt stone 14"x8"x5" faintly marked, set 12 " in the ground, 2½ ft. SW of a mound of stone.

**DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:**

Show how trees are scribed and basis of bearings, including compass var.

Set 1"x30" iron pipe, 20 ins. in the ground, with brass cap mkd. as shown.  
MONUMENT MARKED

Raised a mound of stone, 3 ft. base to top of pipe.

From which;

A juniper 10 ins. diam., bears S38°E., 125.0 ft., mkd.  
 T8S R30E S24 BT.

A juniper, 5 ins. diam., bears N57°E., 147.2 ft.,  
 mkd. X BT.

Complete and File with Office of the Grant Chain & compass.  
 County Surveyor, Grant County, Oregon, Var. 20° East.  
 Courthouse, Canyon City, Oregon 97820

