


CORNER RESTORATION

SW cor. Sec 25
CORNER _____ TWP 8S. RANGE 30 E., W.M.

ORIGINAL SURVEY BY: F.W. Campbell

CONTRACT NUMBER: 380

CONTRACT DATE: March 19, 1881

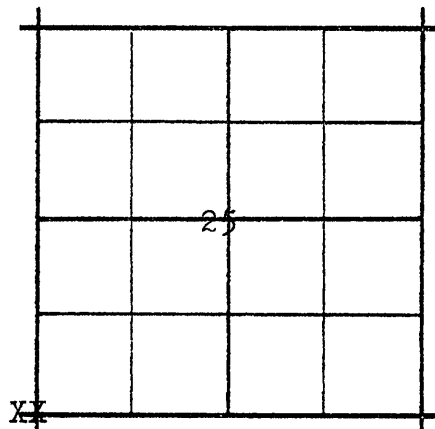

ORIGINAL DESCRIPTION:

Set a basalt stone 15x12x8 and raised maound of stone for cor. to secs. 25,26,35,&36.

RESTORATION BY, STAMP AND DATE:

Bagett & Griffith Surveying
John Day, Oregon

April 10, 1970



EVIDENCE FOUND: Basalt stone 15x12x8 ins. marks visible

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.
Set 1"x30" iron pipe 10 ins. in ground, with brass cap mkd. as shown.
Raised a mound of stone 4 ft. base to top of pipe.
From which: MONUMENT MARKED

A juniper, 12 ins. diam., bears S18^oW., 181.9 ft., mkd. T8S R30E S35 BT.

No other trees available.

Chain & compass . Var. 20^oEast.

Complete and File with Office of the Grant
County Surveyor, Grant County, Oregon,
Courthouse, Canyon City, Oregon 97820

