


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established in 1881 by F.W. Campbell, under general land office contract No. 380.
Surveyor general records state:
Set a basalt stone 18x12x8 and raised a mound of stone for corner to sec. 2,3,10,& 11.

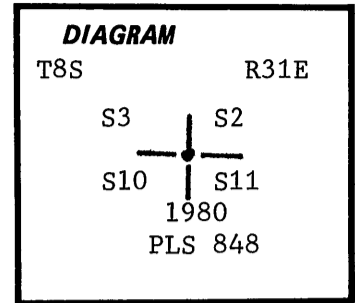

Description of corner evidence found:

Found a basalt stone 16"x12"x7", lying flat in an old mound of stone. 5 grooves visible on face of stone.
No bearing trees originally established, accepted position of the center of the mound of stone as the corner position.

Description of monument and accessories established to perpetuate the original location of this corner:

Set 3"x30" galv iron pipe with 3" brass cap 24" in ground & placed stones around pipe. Stamped brass cap as shown in diagram. Placed original stone alongside pipe.
From which:
A pine 14" dia bears N 77 W 95.4 ft. Scribed T8S R31E S3 BT.
A juniper 18" dia bears N 18 E 18.7 ft " " " S2 "
A pine 14" dia bears S 33 W 113.9 ft. " " " S10 "
Nailed brass washers stamped PLS 848 & bearing tree signs to each tree, painted red band around each tree. Set steel posts with warning & bdry. signs 7'N & 6'S.
Bearing- mag. compass 20 E Dec.
No bearing trees available.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Douglas M. Ferguson
OREGON
JULY 12, 1968
DOUGLAS M. FERGUSON
848

Witnesses to above corner

D. Herburger
L. Wyllie

Office of... *Surveyor* ... County of... *Grant* ...
State of... *Oregon* ... I hereby certify that the within instrument was filed in this office
for record on the... *12* day of... *Jan* ... , 19*81*..
Robert D. Baggett by
(COUNTY OFFICIAL) (DEPUTY)