


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner Established in 1881 by F.W. Campbell, under General Land office Contract No. 380.
Surveyor general notes state:
Set basalt stone 20x8x6 and dug pits for 1/4 sec. corner.

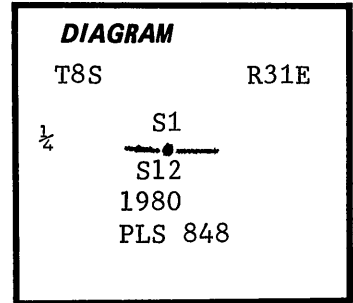

Description of corner evidence found:

After thorough search of the area no evidence is found.
No bearing trees were taken when original survey was made although it appears trees were available.
Position of corner is established by proportion.

Description of monument and accessories established to perpetuate the original location of this corner:

Set 3"x30" iron pipe with 3" brass cap 22" in the ground. Stamped brass cap as shown in diagram.
From which:
A pine 10" dia bears N 76 W, 49.6 ft. scribed 1/4 S1 BT.
A pine 9" dia. bears S 30 E, 38.1 ft. " " S12 BT.
Nailed brass washers stamped PLS 848 & bearing signs to each tree, painted red band around each tree. Set steel posts 5'S from corner with bearing signs.
Bearing-True Grid

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Douglas M. Ferguson
OREGON
JULY 12, 1968
DOUGLAS M. FERGUSON
848

Witnesses to above corner.

D. Herburger
L. Wyllie

Office of..... *Surveyor* County of..... *Grant*
State of..... *Oregon* I hereby certify that the within instrument was filed in this office
for record on the... *17* day of... *Jan* 19... *81*
..... *Robert D. Bayard* by
(COUNTY OFFICIAL) (DEPUTY)