


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:  
Corner not previously established.

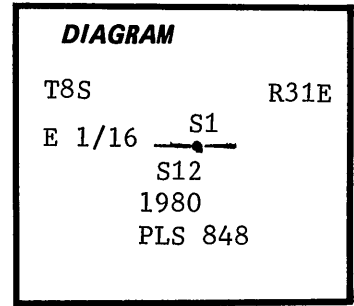

Description of corner evidence found:

N.A.

Description of monument and accessories | established to perpetuate the original location of this corner:

Set 3"x30" galv iron pipe with 3' brass cap 25" in the ground & stamped cap as shown in the diagram.

From Which:

A fir 18" dia bears N 56 E 28.8 ft. scribed E 1/16 S1 BT  
" " 16" dia bears S 46-30 E 13.7 ft. " " " S12 "

Nailed brass washers stamped PLS 848 & bearing tree signs to each tree, painted red band around each tree. Set steel posts with warning & bdry. signs 5'N & 5'S from corner. Bearing-Solar Grid.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*[Signature]*  
OREGON  
JULY 12, 1968  
DOUGLAS M. FERGUSON  
848

Witnesses to above corner.

D. Herburger

L. Wyllie

Office of Surveyor County of Grant  
State of Oregon , I hereby certify that the within instrument was filed in this office  
for record on the 17 day of Jan , 1981.  
Robert D. Baggett by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)