


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established in 1881 by F.W. Campbell under general land contract No. 380
Surveyor general records state:
Set a basalt stone 10x10x10 and raised a mound of stone for 1/4 sec. corner.

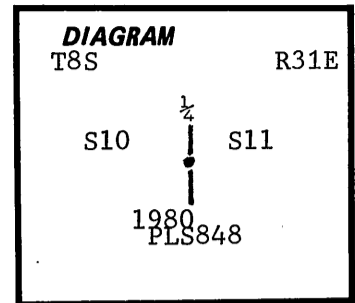

Description of corner evidence found:

No trace of original evidence found apparently the stone & mound of stone have been used in adjacent fence.
No bearing trees where originally established. Corner position is set by proportion.

Description of monument and accessories established to perpetuate the original location of this corner:

Set 3"x30" galv iron pipe 6" in the ground & raised a mound of stone around the pipe. Stamped brass cap as shown in diagram.

From which:

A juniper 10" dia bears S27-40E 33.8 ft. scribed 1/4 S11 BT
A " 9" " " S 11-30W 36.1 ft. " " S10 "

Nailed brass washers stamped PLS848 & bearing tree signs to each tree, painted red band around each tree. Set steel post 5'N & 6" S from corner with warning & bdry. signs.
Bearing-Solar Grid

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Douglas M. Ferguson
OREGON
JULY 12, 1968
DOUGLAS M. FERGUSON
848

Witness to above corner.

D. Herburger

Office of *Surveyor* County of *Grant*
State of *Oregon*, I hereby certify that the within instrument was filed in this office
for record on the *12* day of *Jan*, 19*81*
Robert D. Skiff by _____
(COUNTY OFFICIAL) (DEPUTY)