


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not prev. established.

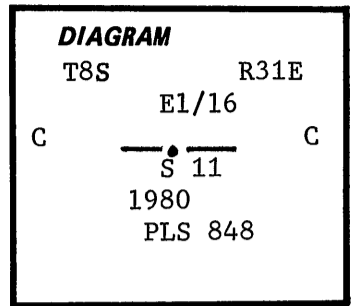

Description of corner evidence found:

N.A.

Description of monument and accessories I established to perpetuate the original location of this corner:

Set 3"x30" galv iron pipe with 3" brass cap 24" in ground. Stamped brass cap as shown in diagram

From which:

A tamarack 11" dia. bears N 17-30 W 26.5 ft scribed CE 1/16 S11 BT

A " 10" dia. bears S 46-30 E 37.2 ft " " " "

Nailed brass washers stamped PLS 848 & bearing tree signs to each tree, painted red band around each tree. Set steel posts with warning & bdry signs 5'W & 5'S from corner.

Bearing_ True Grid

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Douglas M. Ferguson
OREGON
JULY 12, 1968
DOUGLAS M. FERGUSON
848

Witness to above corner

D. Herburger
L. Wyllie

Office of Surveyor County of Grant
 State of Oregon, I hereby certify that the within instrument was filed in this office
 for record on the 12 day of Jan, 1981
Robert D. Baggett by _____
 (COUNTY OFFICIAL) (DEPUTY)