


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established in 1881 by F.W. Campbell, under general land office contract No. 380.
Surveyor general records state:
Set a basalt stone 13x6x5 and dug pits as per instructions.

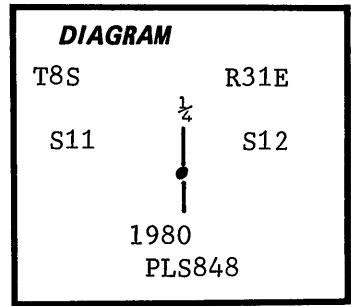

Description of corner evidence found:

No evidence found. No bearing trees taken in original survey. Position is determined by proportion.

Description of monument and accessories established to perpetuate the original location of this corner:

Set 3"x30" galv iron pipe with 3" brass cap 24" in ground & stamped brass cap as shown in diagram.
From which:
A pine 18" dia. bears N47E 15.1 ft. scribed 1/2 S12 BT.
A " 20" " " S 16W 4.8 ft. " " S11 "
Nailed brass washers stamped PLS848 & bearing tree signs to each tree, painted red band around each tree. Set steel post 5'N from corner with warning sign
Bearing-Solar Grid.

Witnesses to above corner.

D. Herburger
L. Wyllie

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Douglas M. Ferguson
OREGON
JULY 12, 1968
DOUGLAS M. FERGUSON
848

Office of *Surveyor* County of *Grant*
State of *Oregon*, I hereby certify that the within instrument was filed in this office
for record on the *12* day of *Jan*, 19*81*
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)