


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not prev. established.

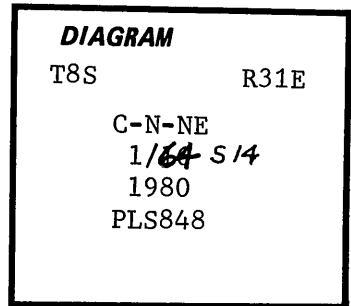

Description of corner evidence found:

N.A.

Description of monument and accessories established to perpetuate the original location of this corner:

Set 3"x30" galv iron pipe with 3" brass cap 27" in ground, stamped brass cap as shown in diagram.

From which:

A juniper 10" dia bears N31W 4.8 ft. scribed CN-NE 1/16 S14 BT.
A " " " " S79E 8.9 ft. " " " " "

Nailed brass washers stamped PLS848 & bearing tree signs to each tree, painted red band around each tree. Set steel posts with warning & bdry. signs 5'S & 5'W from corner.

Bearing_solar Grid

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Witnesses to above corner.
D. Herburger
L. Wyllie

Douglas M. Ferguson

OREGON
JULY 12, 1968
DOUGLAS M. FERGUSON
848

Office of..... *Surveyor* County of..... *Grant*

State of..... *Oregon*, I hereby certify that the within instrument was filed in this office
for record on the..... *12*..... day of..... *Jan*, 19..... *81*.....

..... *Robert D. Siggett* by

(COUNTY OFFICIAL) (DEPUTY)