


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not prev. established

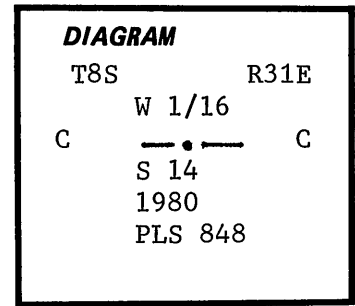

Description of corner evidence found:

N.A.

Description of monument and accessories | established to perpetuate the original location of this corner:

Set 3"x30" galv iron pipe with 3" brass cap 14" in ground & raised a mound of stone & earth around pipe. Stamped brass cap as shown in diagram.

From which:

A juniper 9" dia bears S 30 E 2.6 ft. scribed CW 1/16 S14 BT.

" " 18" dia bears N 78 W 30.8 ft. " " " " "

Nailed brass washers stamped PLS 848 & bearing tree signs to each tree, painted red band around each tree. Set steel posts with warning & bdry signs 5'N & 5' W from corner Bearing-mag compass 20 E Dec.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*[Signature]*  
OREGON  
JULY 12, 1968  
DOUGLAS M. FERGUSON  
848

Witnesses to above corner.

D. Herburger  
L. wyllie

Office of... *Surveyor* ... County of... *Grant* ...  
State of... *Oregon* ... I hereby certify that the within instrument was filed in this office  
for record on the... *12* day of... *Jan* ... 19...*81*  
*Robert L. Duggett* by .....  
(COUNTY OFFICIAL) (DEPUTY)