


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

This corner was established in 1884 by Herman D. Gradon, under General Land Office Contract No. 499.

Surveyor General's Records state:

Set a 3"x3"x3' 24" in the ground.  
A pine 6" dia. bears N23°E 17 lks.  
A. Fir 7" dia. bears S48°E 12 lks.

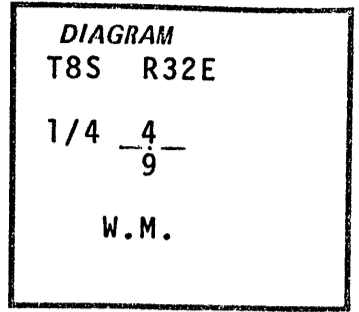

Description of corner evidence found:

None

Description of monument and accessories established to perpetuate the original location of this corner:

I set a 2"x30" flanged G.I. Pipe with 2-1/2" Brass cap exposed 10".


I marked the following trees with a washer (L.S. 1679) in the lower blaze:

Spruce 8" dia. bears N35°56'E 44.7 feet.  
D. Fir 17" dia. bears S34°46'E 26.6 feet.

Monument set 3/18/81.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Kurt C. Weaver*  
OREGON  
JULY 14, 1978  
KURT C. WEAVER  
1679

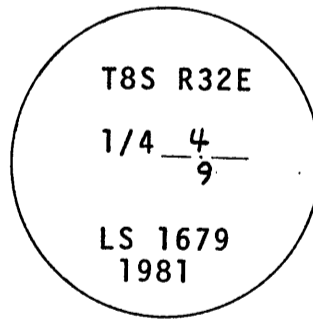

Office of Surveyor County of Grant  
Oregon, I hereby certify that the within instrument was filed in this office  
 for record on the 28 day of Oct, 1981  
*Robert D. Beyer* by \_\_\_\_\_  
 (COUNTY OFFICIAL) (DEPUTY)