


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

This corner was established in 1884 by Herman D. Gradon, under General Land Office contract No. 499.

Surveyor General's Records state:

Set a 4"x4"x4' post 24" in the ground.
A Black Pine 6" dia. bears N23°E 24 lks.
A Black Pine 8" dia. bears S80°E 31 lks.
A Tamarack 7" dia. bears S47°W 39 lks.
A Tamarack 10" dia. bears N55°W 22 lks.

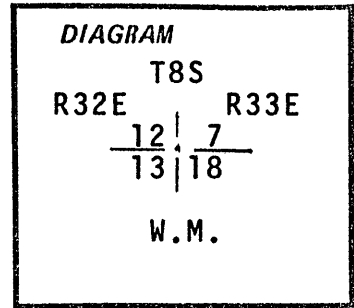

Description of corner evidence found:

None


Description of monument and accessories I established to perpetuate the original location of this corner:

I set a 2"x30" flanged G.I. pipe with 2-1/2" brass cap exposed 5".

I marked the following trees with washer (LS 1679) in the lower blaze.

Spruce 9" dia. bears N13°53'E 64.6 feet.
Spruce 12" dia. bears S87°38'E 96.2 feet.
Spruce 13" dia. bears S23°41'W 27.4 feet.
W. Fir 14" dia. bears N69°11'W 57.3 feet.

Monument set 4/30/81.

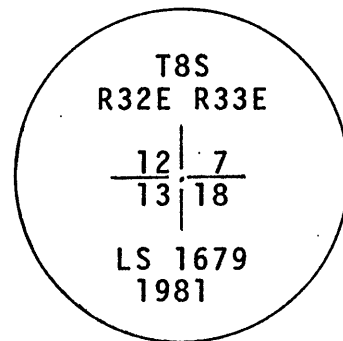

Office of.....**Surveyor**..... County of.....**Grant**.....
State of.....**Oregon**..... I hereby certify that the within instrument was filed in this office
for record on the.....**28**..... day of.....**Oct**....., 19**81**.....
Robert D. Begett by.....
(COUNTY OFFICIAL) (CITY)