


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

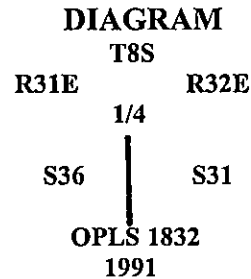

History of original corner establishment: Corner was established in 1881 by Meldrum and Campbell under GLO Contract #380. Surveyor General records state:

- Set a pine post for 1/4 sec. cor. from which:
 A fir 6 in. dia. bears N40°E, 8 lks.
 A fir 4 in. dia. bears S70°W, 28 lks.

In 1991 Fayette Munro, PLS 1832, proportioned the corner and set a 2 1/2" X 30" aluminum pipe with 2 1/2" aluminum cap stamped as shown in DIAGRAM in a mound of stone from which:

- A 13" P pine bears S21 1/4°W 27.8', scribed: 1/4 S36 BT
 A 20" P pine bears S25°E, 37.2', scribed: 1/4 S31 BT
 A 16" D fir bears N73 1/4°E, 52.3', scribed: 1/4 S31 BT
 A 35" P pine bears N34°E, 51.2', scribed: 1/4 S31 BT

Description of corner evidence found: A 2 1/2" brass cap stamped as shown in DIAGRAM set 27" in ground; From which:


- A 16" P pine bears S21°W 27.8', scribing visible but not legible
 A 20" D fir bears N73°E, 52.3', scribing visible but not legible
 A 36" P pine bears N34°E, 51.2', scribed: 1/4 S31 BT

Description of monument and accessories I establish to perpetuate the original location of this corner:

An 8" D. fir bears S31°E 39.49' scribed 1/4 S31 BT

Set a 50d nail at crown perpendicular to the cap. The bearing was taken with a staff compass with a 15° East declination and we used a steel chain to pull the distance.

Witnesses: Corey Watson, Ken Clingman, and Brady Long
Date 9/14/10

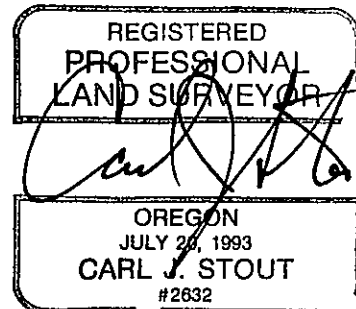

Office of County Surveyor, County of Grant, State of Oregon,
I hereby certify that the within instrument was filed in this office
for record on the 5th day of NOVEMBER, 2010.

[Signature] by _____
(COUNTY OFFICIAL) (DEPUTY)