

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

G-05

History of original corner establishment:

1884, HERMAN D. GRADON, UNDER CONTRACT NO. 499, ESTABLISHED THE CORNER. HE SET A POST 3' LONG & 3" SQUARE, 24" IN THE GROUND, FROM WHICH:  
7" PINE, N. 52° E., 23 LINKS.  
10" PINE, N. 42° W., 21 LINKS.

1994, DENNIS L. GAYLORD, PLS 1636, FOUND AT THE CORNER POINT, THE AXE SHARPENED TIP OF THE ORIGINAL CORNER POST AT A DEPTH OF 10" BELOW GROUND SURFACE. AT POINT OCCUPIED BY THIS POINT HE SET A 2 1/2" BY 30" ALUMINUM PIPE, WITH 3 1/4" ALUMINUM CAP, 26" IN THE GROUND, FROM WHICH:

8" DEAD & DOWN LODGEPOLE PINE, SCRIBING "1/4S""BT" VISIBLE ON DOUBLE BLAZE. ROOT HOLE BEARS N. 52° E., 15.18 FEET.  
15" DEAD & DOWN LODGEPOLE PINE, WITH SCRIBING "1/4S BT" VISIBLE ON A FIRE CHARRED BLAZE, WITH A CHAINING NOTCH BETWEEN THE UPPER & LOWER SCRIBED. THE CENTER OF THE REMAINING ROOT CROWN N. 42° W., 13.86 FEET.

MARKED NEW BT'S:  
16" WESTERN LARCH, N. 63° E., 17.5 FEET.  
25" WESTERN LARCH, S. 65°30' E., 25.0 FEET.  
24" WESTERN LARCH, S. 77° W., 13.7 FEET.  
9" WHITE FIR, N. 38° W., 43.7 FEET.

Description of corner evidence found:

FOUND A 2 1/2" ALUMINUM PIPE, WITH 3 1/4" ALUMINUM CAP, PROJECTING 4" OUT OF THE GROUND AND SURROUNDED BY A STONE MOUND, MARKED AS SHOWN (SEE DIAGRAM), FROM WHICH:

8" DEAD WINDTHROWN LODGEPOLE PINE, N. 52° E., 15.2 FEET, SCRIBING "1/4 S""BT" VISIBLE ON DOUBLE BLAZE (ORIGINAL BT).  
16" WESTERN LARCH, N. 63° E., 17.5 FEET, SCRIBING "1/4 S8""BT" VISIBLE ON DOUBLE BLAZE (1994 BT).  
25" WESTERN LARCH, S. 65 1/2° E., 25.0 FEET, SCRIBING "1/4 S8""BT" VISIBLE ON DOUBLE BLAZE (1994 BT).  
24" WESTERN LARCH, S. 77° W., 13.7 FEET, SCRIBING "1/4 S7""BT" VISIBLE ON DOUBLE BLAZE (1994 BT).  
15" DEAD WINDTHROWN LODGEPOLE PINE, N. 42° W., 13.9 FEET, SCRIBING "1/4S BT" VISIBLE ON A FIRE CHARRED BLAZE WITH CHAINING NOTCH BETWEEN THE SCRIBING (ORIGINAL BT).  
9" WHITE FIR, N. 38° W., 43.7 FEET, SCRIBING "1/4 S7""BT" VISIBLE ON DOUBLE BLAZE (ORIGINAL BT).


THE 1994 BT'S HAVE A 3/4" BRASS WASHER STAMPED "PLS 1636" NAILED TO THE SCRIBED "B" ON THE LOWER BLAZE.

Description of monument and accessories I established to perpetuate the original location of this corner:

NAD83(1991)  
LATITUDE: 44°53'17.30037" NORTH  
LONGITUDE: 118°39'24.25301" WEST

MAGNETIC DECLINATION: 20° EAST

WORKED PERFORMED BY: DAVID A. SCHLAICH  
DATE: JULY, 1995

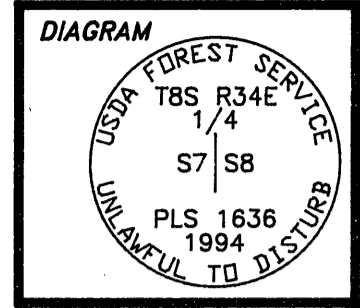

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*David A. Schlaich*

OREGON  
JULY 16, 1987  
DAVID A. SCHLAICH  
2308

RENEWS 06/30/96

Office of..... *Surveyor* ..... County of..... *Grant* .....  
State of..... *Oregon* ....., I hereby certify that the within instrument was filed in this office  
for record on the..... *6* day of..... *July* ....., 19..... *95* .....  
..... *Robert D. Baggett* ..... by.....  
(COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

*See map A Survey 1383*

G-05