


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

J-03

History of original corner establishment:

1884, HERMAN D. GRADON, UNDER CONTRACT NO. 499, ESTABLISHED THE CORNER. HE SET A POST 3' LONG & 3" SQUARE, 24" IN THE GROUND, FROM WHICH:  
7" PINE, N. 21° E., 12 LINKS.  
7" PINE, S. 35° E., 12 LINKS.

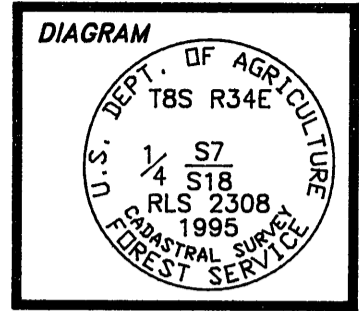

Description of corner evidence found:

NONE:

Description of monument and accessories I established to perpetuate the original location of this corner:

FINDING NO EVIDENCE OF THE ORIGINAL CORNER I SET BY SINGLE PROPORTION A 2 1/2" BY 30" ALUMINUM PIPE, WITH A 3 1/4" ALUMINUM CAP, 15" IN THE GROUND SURROUNDED BY A STONE MOUND 2' DIAMETER BY 16" HIGH, MARKED AS SHOWN (SEE DIAGRAM), FROM WHICH:

- 20" ENGLEMANN SPRUCE, N. 1 3/4° E., 40.3 FEET, SCRIBED "1/4 S7""BT".
- 7" WHITE FIR, S. 61 3/4° E., 12.7 FEET, SCRIBED "1/4 S18""BT".
- 17" ENGLEMANN SPRUCE, S. 19 1/4° W., 42.4 FEET, SCRIBED "1/4 S18""BT".
- 15" WESTERN LARCH, N. 19 1/2° W., 41.6 FEET, SCRIBED "1/4 S7""BT".

THE BT'S ARE DOUBLE BLAZED AND HAVE A 3/4" BRASS WASHER STAMPED "RLS 2308" NAILED TO THE LOWER BLAZE BETWEEN THE "BT" SCRIBING.

NAD83(1991)  
LATITUDE: 44°52'51.70230" NORTH  
LONGITUDE: 118°40'01.39770" WEST

MAGNETIC DECLINATION: 20° EAST

WORKED PERFORMED BY: DAVID A. SCHLAICH  
WITNESSED BY: RACHELLEL (SHELLY) FLETCHER  
DATE: AUGUST 31, 1995

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*David A. Schlaich*

OREGON  
JULY 16, 1987  
DAVID A. SCHLAICH  
2308

RENEWS 06/30/96

Office of Surveyor County of Grant  
State of Oregon, I hereby certify that the within instrument was filed in this office  
for record on the 6 day of Oct, 1995  
Robert D. Baggett by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)