


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

J-9

History of original corner establishment:

1884, Herman D. Gradon, under contract No. 499, established the corner. He set a post 4' long & 4" square, 24" in the ground, from which:

- 15" Fir bears, N. 55° E., 26 lks.
- 8" Pine bears, S. 38° E., 19 lks.
- 16" Tamarack bears, S. 66° W., 40 lks.
- 6" Pine bears, N. 74° W., 37 lks.

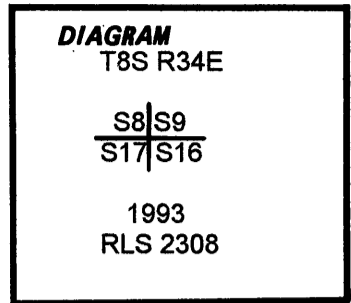

Description of corner evidence found:

Found the SW BT:

20" Western Larch bears, S. 66° W., 40 lks. (26.4 feet), with healed blaze chopped opened to reveal scribing.

Description of monument and accessories I established to perpetuate the original location of this corner:


At record bearing and distance from the found BT, I set a 2 1/2" by 28" aluminum pipe, with a 3 1/4" aluminum cap, 20" in the ground and marked new BT's:

- 8" Douglas Fir bears, N. 30° E., 24.1 feet, marked "T8S R34E S9" "BT".
- 15" Douglas Fir bears, S. 9° E., 34.7 feet, marked "T8S R34E S16" "BT".
- 7" Lodgepole Pine bears, N. 82° W., 26.9 feet, marked "T8S R34E S8" "BT".

The new BT's are double blazed and have a brass washer stamped "RLS 2308" nailed to the lower blaze by the "BT" scribing.

Magnetic Declination: 20° East

Work performed by: David A. Schlaich (RLS 2308)
Witnessed By: Troy Allen & Ira McCauley
Date: August, 1993

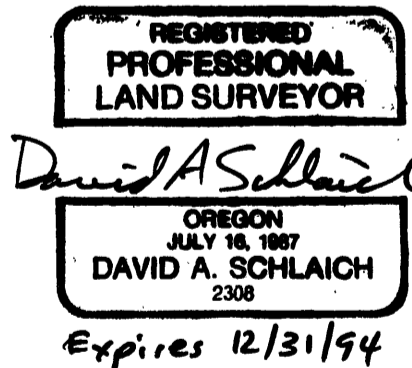

Office of... Sherman ... County of... Grant ...
 State of... Oregon ... I hereby certify that the within instrument was filed in this office
 for record on the... 2 day of... Feb ... , 19... 94 ...
Robert D. Layton ... by ...
 (COUNTY OFFICIAL) (DEPUTY)