

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


P - 5

History of original corner establishment:

This corner was originally established by Herman D. Gradon in July, 1884, under contract No. 499, as follows:

Set a post for the corner, from which:

- A 15" fir bears S50°E, 42 links.
- A 14" fir bears S5°W, 18 links.
- Both blazed and scribed "1/4S BT".

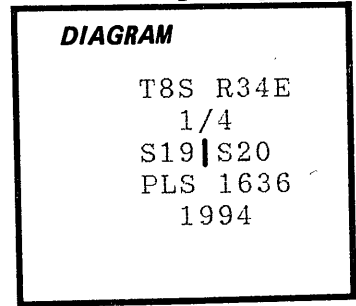

Description of corner evidence found:

The original post is gone. The original 14" fir is a live 22" Douglas-fir with a single healed blaze. Bears S5°W, 11.88 feet. The root crown of the original 15" fir bears S50°E, 27.72 feet. There is nothing left of this tree other than the root crown.

Description of monument and accessories | established to perpetuate the original location of this corner:

At record bearing and distance from the original bearing trees, set a 2 1/2" x 30" aluminum pipe 24" into the ground and surrounded by a mound of stones. A 3 1/4" aluminum cap attached is marked as shown in the diagram, above. From which:


- A 18" Western Larch bears S83°45'E, 47.6 feet scribed "1/4S20 BT".
- A 9" Lodgepole Pine bears N28°E, 28.8 feet scribed "1/4S20 BT".
- A 9" Lodgepole Pine bears N42°W, 46.4 feet scribed "1/4S19 BT".

All bearing trees have a sign 54-3, "Bearing Tree", nailed above the blazes and a sign 54-9, "Land Survey Monument", nailed to the back. The new bearing trees have a 5/8" brass washer, marked "PLS 1636", nailed to the scribed "B" in the lower of double blazes.

I hereby certify the above corner was perpetuated as hereon described on September 20, 1994.

Magnetic declination: 20° E.

NAD1983 Geographic position (+ or - 2 to 5 meters):
Latitude: 44-51-31.44 N
Longitude: 118-39-23.64 W

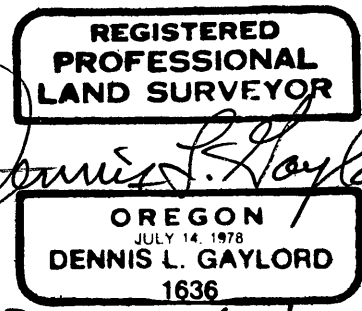

Renews 6/30/1995

Office of COUNTY SURVEYOR County of GRANT
 State of OREGON, I hereby certify that the within instrument was filed in this office
 for record on the 29 day of Sept, 1994
Robert D. Smith by _____
 (COUNTY OFFICIAL) (DEPUTY)