

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**


**History of original corner establishment:**

Original Survey by W. B. Barr under contract No. 492 dated August 22 1883

Set post 4 ft long 3 ins square 24 ins in the ground for 1/4 sec cor. marked 1/4 S on W Face from which

A Tamarac 12 ins diam bears S15° E 122 lks dist. marked 1/4 S BT

A Tamarac 30 ins diam bears S80 W 27 lks dist marked 1/4 S BT

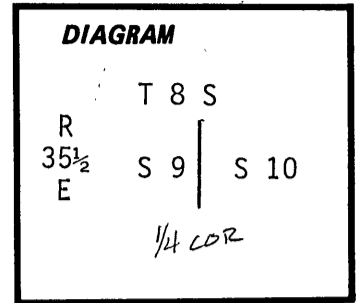

**Description of corner evidence found:**

At the corner location I found no evidence of the original post. The SW BT is a dead and down 20" Tamarack bearing S 80° W 17.8 ft marked 4S BT

The SE BT is a standing dead 10" Tamarack bearing S 15° E 80.5 ft marked 1/4 S BT.

**Description of monument and accessories I established to perpetuate the original location of this corner:**

At the intersect of the distances of the bearing trees I set a 2 1/2"x32" Brass capped steel pipe 26" in the ground from which

A 7" White Fir bears S110 W 5.37 ft marked 1/4 S 9 BT nail in W. base


A 7" White Fir bears S 48° E 21.77 Ft. marked 1/4 S 10 BT nail in N base

Bearings taken with a staff compass declination 18 1/2° E per 1980 Isogonic chart

Distances pulled to 60d nails with brass washers stamped LS 1898 driven in the side center of bearing trees.

Monument Stamped

	T 8 S	
R 35 1/2 E	S 9	S 10
	1982 O.R.L.S. 1898	

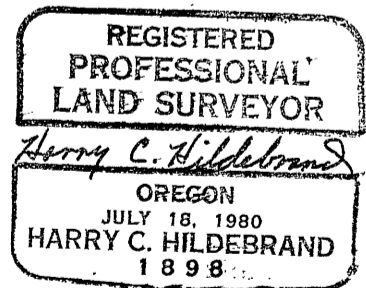

Office of... Surveyor..... County of..... Grant.....  
 State of... Oregon....., I hereby certify that the within instrument was filed in this office  
 for record on the 23 day of Nov, 1982  
*Robert D. Light* by.....  
 (COUNTY OFFICIAL) (DEPUTY)