


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: Corner originally established by W. B. Barr under contract No. 492, dated August 1883.

Set Spruce post 3 ft. long 3 ins. sq. 24 ins in the ground for $\frac{1}{4}$ Sec. cor. marked $\frac{1}{4}$ S on N face from which
 A Pine 12 ins. diam bears S25W18 lks. dist marked $\frac{1}{4}$ SBT
 A Pine 12 ins. diam bears N40W42 lks. dist marked $\frac{1}{4}$ SBT
 James H. Hambleton performed a retracement survey, dated June 1968 for the Wallowa-Whitman National Forest:

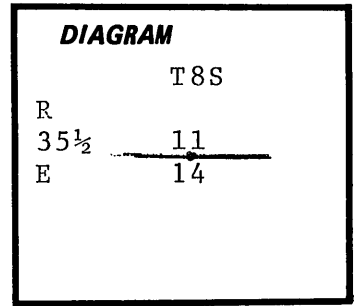

Found one bearing tree alive.
 Set a one inch iron pipe with alunimum cap stamped as per diagram. $\frac{1}{4}$ S11
 A 12" pine bears S25W, 18 lks. marked $\frac{1}{4}$ SBT. (Old BT.) 1968 S14
 A 12" pine bears N40W 42 lks, marked $\frac{1}{4}$ SBT. (old BT.) 645
 A 8" Tamarack bears N04E, 9.35 feet scribed $\frac{1}{4}$ SBT. (New BT.)

Description of corner evidence found:


At the corner location I found Hambleton's alunimum cap as described.
 From the cap I found
 An 8" Tamarack bears N04 \circ E, 9.35 feet dist.
 marked $\frac{1}{4}$ S BT

 A dead 12" pine bears S25W 18 lks. dist.
 marked $\frac{1}{4}$ S BT.

Description of monument and accessories I established to perpetuate the original location of this corner:

From the alunimum cap I set one new bearing tree:
 A 9" Fir bears S11 \circ E, 23.22 feet dist.
 marked $\frac{1}{4}$ S14 BT nail in W. base.

All Bearings taken with staff compass declination 18 $\frac{1}{2}$ \circ East per 1980 Isogonic chart.
 All Distances pulled to 60d nails with brass washers stamped LS 1898 set in side center of bearing trees.

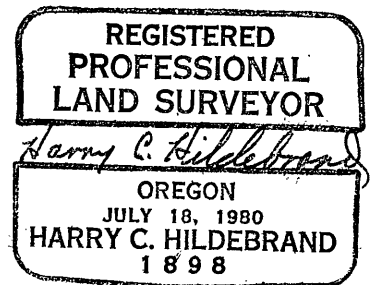

Office of..... Surveyor..... County of..... Grant.....
 State of..... Oregon....., I hereby certify that the within instrument was filed in this office
 for record on the 23 day of Nov, 1982
Robert D. Bayliff by.....
 (COUNTY OFFICIAL) (DEPUTY)