

RECEIVED AND
FILED

JUN 1 1978

JOHN LIVEIRA, County Clerk

CORNER RESTORATION


By _____ Deputy

CORNER $S \frac{1}{4}$ TWP 13 S. RANGE 29 E.

ORIGINAL SURVEY BY: JOHN B. DAVID

CONTRACT NUMBER: 131

CONTRACT DATE: JUNE 8, 1869

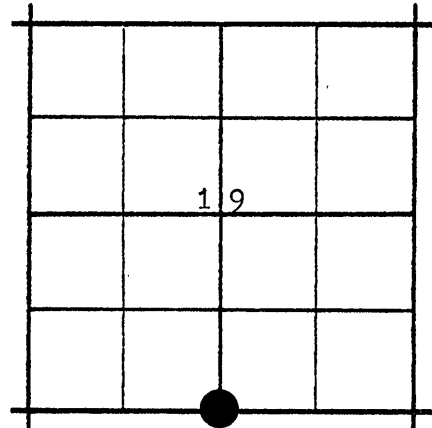



ORIGINAL DESCRIPTION:

N. $89^{\circ}51'$ East on a true line between Secs. 19 & 30.

41.70 Set Stone 16 x 12 x 8 for $1/4$ Sec. Corner.

RESTORATION BY, STAMP AND DATE:

OREGON EAST ENGINEERING, INC.
PO BOX 277
MT. VERNON, OREGON



EVIDENCE FOUND:

NO EVIDENCE WAS FOUND IN THE AREA WHERE THE CORNER WAS ORIGINALLY ESTABLISHED.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

SET, BY SINGLE PROPORTION, A $2\frac{1}{2}$ " x 30" GALV. IRON PIPE, WITH BRASS CAP, IN THE GROUND AND RAISED A MOUND OF STONE UP AROUND THE MONUMENT.
FROM WHICH:

AN 8" JUNIPER BEARS $N63^{\circ}W$ - 76.1 FT.
SCRIBED $1/4$ S 19 BT

A 4" JUNIPER BEARS $S22^{\circ}E$ - 133.4 FT.
SCRIBED $1/4$ S 30 BT

COMPASS VARIATION $20^{\circ}E$.

Complete and File with Office of the Grant
County Surveyor, Grant County, Oregon,
Courthouse, Canyon City, Oregon 97820

MONUMENT MARKED

