

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Eugene P. McCormack under GLO contract number 398, dated July 2, 1881. Surveyor General record states:

Set a basalt stone 12x12x12 ins 8 ins in the ground for ¼ sec cor, marked ¼ on W face, from which:

A Fir 3 ft in diam bears N52°E, 28 lks dist marked ¼S BT
 A Pine 10 ins diam bears N75°W, 33 lks dist marked ¼S BT

Corner remonumented in September, 1979 by William L. Hanley. His notes state: Found a sawed fir stump 31 ins diam with healed blaze for Section 21 BT. Found a windblow pine snag 8 ins diam with full scribes for section 24 BT. Set a 2½" brass cap in 2" iron pipe 31" long 25" in ground with a surrounding rock mound. Brass cap marked (markings shown below).



New bearing trees:
 A fir 8 ins diam bears S18°E, 14.5 ft dist mkd ¼ S21 BT.
 A fir 4 ins diam bears N48°E, 29.5 ft dist mkd ¼ BT.

No record of subsequent monumentation found in Grant County survey records.
Description of corner evidence found:

Found a 2 inch brass cap on a 1 inch galvanized iron pipe in a mound of stone, with brass cap marked:

Hanley Bearing Trees:
 Found a 6" diameter White Fir N48°E, 29.5 feet, Live and vigorous with scribes visible.
 Found a 12" diameter Douglas Fir S18°E, 14.5 feet, Live and vigorous with scribes visible.

Original Bearing Trees:
 Found a 36" diameter White Fir stump N55°E, 28 lks, with scribes visible.
 Found the rotted remains of a pine N75°W, 33 lks, dead and down with scribes visible.

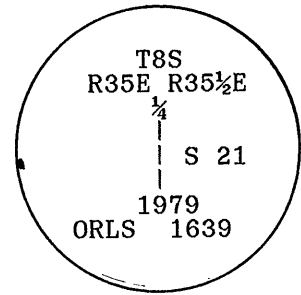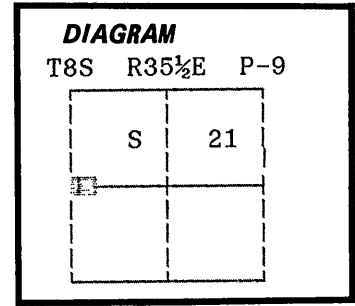

See map of survey dated September, 1987, *No. 1019*
Description of monument and accessories established to perpetuate the original location of this corner:

From the above described brass cap monument:

New BT:
 A 21 inch diameter Western Larch bears N2°E, 114.11 feet marked ¼ S21 BT

Painted a 6 inch red band around all BTs and attached 54-9 and 54-3 signs.

Set a steel fencepost approximately 5 feet North with 54-9 sign attached.

NOTE: I took the additional bearing tree as shown, although I feel the Hanley bearing trees will survive.

I hereby certify that the above corner point was perpetuated as hereon described on August 5, 1987.



I used a steel tape and magnetic compass in the establishment of new accessories. I used 17° East magnetic declination and the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 644 to the BT blaze.

Office of..... *Surveyor* County of..... *Grant*
 State of..... *Oregon*, I hereby certify that the within instrument was filed in this office for record on the..... *22* day of..... *Oct*, 19..... *87*
 by..... *Robert D. Griffith* (COUNTY OFFICIAL) by..... (DEPUTY)