

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Herman D. Gradon under GLO contract number 499, dated March 11, 1884. Surveyor General record states:

Set a post 4 ft long 4 ins square 24 ins in ground for cor to secs 13, 14, 23 and 24 marked T8S S13 on NE, R35E S24 on SE, S23 on SW and S14 on NW faces with 3 notches on S and 1 notch on E edges from which:

- A Pine 7 ins dia brs N54°E, 59 lks dist marked T8S R35E S13 BT
- A Pine 7 ins dia brs S52°E, 42 lks dist marked T8S R35E S24 BT
- A Pine 7 ins dia brs S8°W, 7 lks dist marked T8S R35E S23 BT
- A Pine 7 ins dia brs N55°W, 34 lks dist marked T8S R35E S14 BT

Corner remonumented in September, 1979 by William L. Hanley. His notes state: Found a beetle killed pine 10 ins diam with full scribes for Section 24 BT. At record location found the rotted remains of a wood post to a depth of 15 ins. Set a 2½" brass cap in 2" iron pipe 31" long 28" in ground with a rock mound marked (markings shown below). New bearing trees: A pine 8 ins diam bears N65°E, 35.0 ft dist mkd T8S R35E S13 BT. A fir 5 ins diam bears S53°E, 18.8 ft dist mkd T8S R35E S24 BT. A fir 5 ins diam bears S22°W, 21.9 ft dist mkd T8S R35E S23 BT. A pine 8 ins diam bears N22°W, 13.1 ft dist mkd T8S R35E S14 BT. No record of subsequent monumentation found in Grant County survey records.

Description of corner evidence found:

Found a 2 inch brass cap on a 1 inch galvanized iron pipe in a mound of stone, with brass cap marked:

Hanley Bearing Trees:

- Found a 8" diameter Lodgepole Pine N65°E, 35.0 feet, Live and vigorous with scribes visible.
- Found a 6" diameter White Fir S53°E, 18.8 feet, sickly with scribes visible.
- Found a 5" diameter White Fir S22°W, 21.9 feet, sickly with scribes visible.
- Found a 8" diameter Lodgepole Pine N22°W, 13.1 feet, Live and vigorous with scribes visible.

Original Bearing Tree:

Found a 9" diameter Lodgepole Pine S52°E, 42 lks, dead, down and rotting, with scribes visible.

See map of survey dated September, 1987. *No. 1019*

Description of monument and accessories | established to perpetuate the original location of this corner:

From the above described brass cap monument:



New BTs:

- A 9 inch diameter Western Larch bears S62°E, 64.60 feet marked T8S R35E S24 BT
- A 12 inch diameter Western Larch bears S23°W, 45.57 feet marked T8S R35E S23 BT

I painted a 6 inch red band around all BTs and attached 54-3 and 54-9 signs.

Set a steel fencepost approximately 5 feet North with 54-9 sign attached.

I hereby certify that the above corner point was perpetuated as hereon described on August 4, 1987.

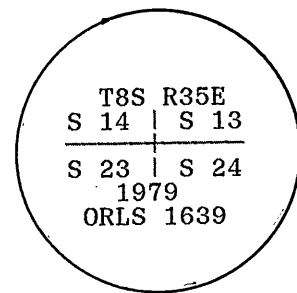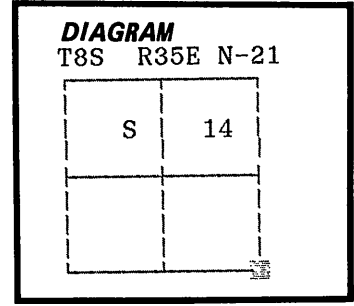

REGISTERED PROFESSIONAL LAND SURVEYOR

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

I used a steel tape and magnetic compass in the establishment of new accessories. I used 17° East magnetic declination and the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 644 to the BT blaze.

Office of *Surveyor* County of *Grant*
State of *Oregon*, I hereby certify that the within instrument was filed in this office for record on the *22* day of *Oct*, 19*87*
Robert H. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)