

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner history continued

Monument and Accessories established by  
Langlitz:


At a position N55°E 25.7 ft. (record) from  
original Fir we set a 2½" x 30" Galvanized Iron  
Pipe 24" in ground with mound of stone and dirt  
to top of pipe. Pipe has a 3" brass cap  
stamped (as shown in corner diagram).

From which:

The original BT - A Douglas Fir 33" dia. bears  
S55°W 25.7 Ft. with visible scribing "1/4 S".

A new BT - A Tamarack 8" dia. bears N62½°E 61.5 ft. scribed 1/4 S26  
BT.

We attached a brass washer stamped LS 1099 to foot of blaze of new BT.

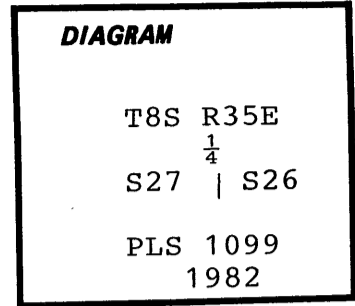

Description of corner evidence found:

Description of monument and accessories | established to perpetuate the  
original location of this corner:

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*William R. Wells*

OREGON  
JULY 22, 1977  
WILLIAM R. WELLS  
1106

Renews 6/30/98

Office of Surveyor County of GRANT  
State of OREGON, I hereby certify that the within instrument was filed in this office  
for record on the 19 day of DEC, 1996  
Robert Q. Hayes by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)