

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Corner originally established by Herman D. Gradon under GLO contract number 499, dated March 11, 1884. Surveyor General record states:

Set a post 3 ft long 3 ins square 24 ins in ground for ¼ sec cor. marked ¼S on N face, from which:

A Pine 4 ins dia brs N10°W, 9 lks dist marked ¼S BT
 A Tamarack 24 ins dia brs S20°W, 47 lks dist marked ¼S BT

Corner remonumented in September, 1979 by William L. Hanley. His notes state: Found a tamarack 26 ins diam with healed blaze for Section 36 BT. No trace of Section 25 BT. At the record location as determined by the section 36 bearing tree found the rotted remains of a wood post to a depth of 18 ins. Set a 2½" brass cap in 2" iron pipe 31" long 27" in ground with a surrounding rock mound. Brass cap marked (markings shown below).
 New bearing trees:
 A fir 9 ins diam bears N12°E, 26.0 ft dist mkd ¼ S25 BT.

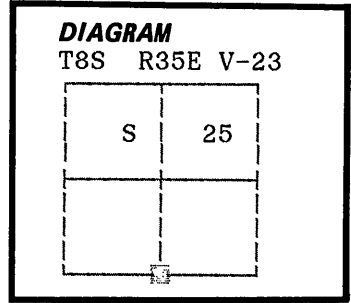


No record of subsequent monumentation found in Grant County survey records.

Description of corner evidence found:

Found a 2 inch brass cap on a 1 inch galvanized iron pipe in a mound of stone, with brass cap marked:

Hanley Bearing Tree:
 Found a 9" diameter Douglas Fir N12°E, 26.0 feet, Live and vigorous with healed blaze.

Original Bearing Tree:
 Found a 27" diameter Tamarack S20°W, 47 lks, live but sickly with blaze evident.

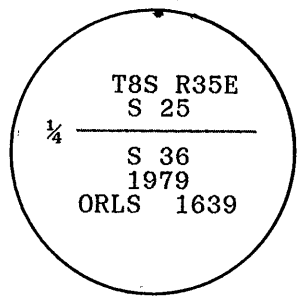

See map of survey dated September, 1987. *No. 1019*

Description of monument and accessories | established to perpetuate the original location of this corner:

From the above described brass cap monument:

New BTs:
 A 5 inch diameter Lodgepole Pine bears N8°E, 48.67 feet marked ¼ S25 BT
 A 16 inch diameter Western Larch bears S45°W, 67.57 feet marked ¼ S36 BT

Painted a 6 inch red band around all BTs and attached 54-3 and 54-9 signs.

Set a steel fencepost approximately 5 feet North with 54-2 and 54-9 signs attached.

I hereby certify that the above corner point was perpetuated as hereon described on August 10, 1987.



I used a steel tape and magnetic compass in the establishment of new accessories. I used 17° East magnetic declination and the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 644 to the BT blaze.

Office of *Saruya* County of *Grant*
 State of *Oregon*, I hereby certify that the within instrument was filed in this office for record on the *27* day of *Oct*, 19*87*
Robert D. Baggett by _____
 (COUNTY OFFICIAL) (DEPUTY)