


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Y.15-21

History of original corner establishment:

None

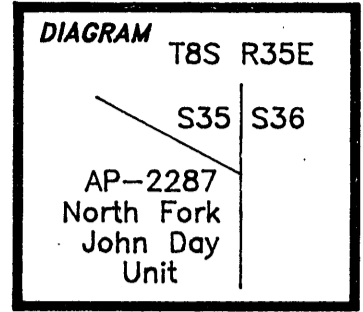


Description of corner evidence found:

None

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 2 1/2" by 30" aluminum pipe, with a 3 1/4" aluminum cap, 22" in the ground, marked as shown, from which:

- 5" Lodgepole Pine, N 77 3/4° E, 19.4 feet scribed "WB/2287 S36" "BT".
- 9" Lodgepole Pine, N 73 1/4° W, 24.8 feet scribed "WB/2287 S35" "BT".



REGISTERED PROFESSIONAL LAND SURVEYOR

*David A Schlaich*

OREGON  
JULY 16, 1987  
DAVID A. SCHLAICH  
2308

RENEWAL DATE: 06/30/2000

Magnetic Declination 19° East  
WORK PERFORMED BY: David A. Schlaich (RLS 2308)  
WITNESSED BY: Ray Parrish  
DATE: October 28, 1999

Office of Surveyor County of Grant  
 State of Oregon, I hereby certify that the within instrument was filed in this office  
 for record on the 9 day of FEB, 192000  
Robert D. Baggett by \_\_\_\_\_  
 (COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

SEE MAP OF SURVEY NO. 1543

Y.15-21