


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Y-21

History of original corner establishment:


1998, Robert D. Bagett, Registered Land Surveyor 598, set a 5/8" X 30" iron pin with attached aluminum cap marked BGB SURVEY MARKER and with appropriate 1/16 designations (Grant Co. Map of Survey No. 1489), from which: 1" iron pin, S 65°53' W, 9.15 feet (Grant Co. Map of Survey No. 924, record 5/8" X 30" iron pin).

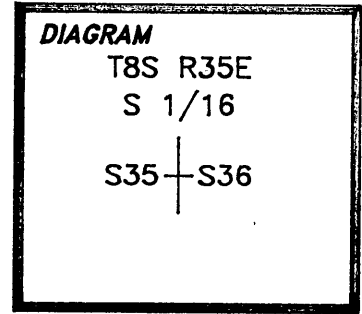

Description of corner evidence found:

Found a 1 1/2" aluminum cap, set flush with the ground, marked as shown, from which:

1 1/2" iron pipe projecting 11" out of the ground, S 65°42' W, 9.16 feet.



Description of monument and accessories I established to perpetuate the original location of this corner:

Marked New BT's:

13" Lodgepole Pine, S 48 3/4° E, 8.4 feet scribed "S1/16 S36" "BT".
7" Lodgepole Pine, N 82 3/4° W, 41.0 feet scribed "S1/16 S35" "BT".

REGISTERED
PROFESSIONAL
LAND SURVEYOR

David A Schlaich

OREGON
JULY 16, 1987
DAVID A. SCHLAICH
2308

RENEWAL DATE: 06/30/2000

Magnetic Declination 19° East
WORK PERFORMED BY: David A. Schlaich (RLS 2308)
WITNESSED BY: Ray Parrish
DATE: October 28, 1999

Office of Surveyor County of Grant

State of Oregon, I hereby certify that the within instrument was filed in this office for record on the 9 day of FEB, 192000

Robert D Bagett by _____ (COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

SEE MAP OF SURVEY NO. 1543

Y-21