


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

N-17

History of original corner establishment:

Corner originally established by Herman D. Gradon in June, 1884, under contract No. 499, as follows:

Set post 4 ft. long, 4 ins. square 24 ins. in ground for corner to secs 14, 15, 22 and 23 marked T9S S14 on NE; R34E, S23 on SE; S22 on SW; S15 on NW faces with 3 notches on S and 2 notches on E edges, from which:  
A 14" Spruce bears N32°E, 14 lks (9.24 feet).  
A 12" Fir bears S20°E, 14 lks (9.24 feet).  
A 6" Fir bears S42°W, 9 lks (5.94 feet).  
A 14" Fir bears N41°W, 33 lks (21.78 feet).

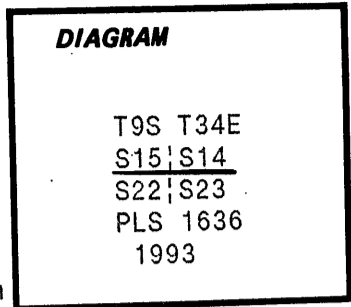

Description of corner evidence found:

The original corner post has rotted off and is lying on the ground. The post is 3"x 3"x 32" long and is marked exactly as described in the GLO notes. I cannot determine by the remains where the post was set. The original 14" Spruce is down and badly decayed. No marks remain. Root hole bears N32°E, 9.24 feet. The original 12" Fir is broken off. Scribes are visible on the decayed log lying alongside. Stump bears S16°E, 9.24 feet. The original 6" Fir is down. Full scribes are visible on the log lying alongside the root hole, which bears S68°W, 5.9 feet. The original 14" Fir is a badly decayed stump. No marks remain. Bears N35°W, 22.8 feet.

Description of monument and accessories established to perpetuate the original location of this corner:

By reference to the original bearing tree remains, set a 2 1/2 inch by 30 inch aluminum pipe 30 inches into boggy ground. A 3 1/4 inch aluminum cap attached is marked as shown in the diagram above, from which:

A 11" White Fir scribed "T9S R34E S15 BT" bears N29°W, 25.2 feet.  
A 9" White Fir scribed "T9S R34E S14 BT" bears N85°30'E, 12.3 feet.  
A 26" Englemann Spruce scribed "T9S R34E S23 BT" bears S18°E, 25.6 ft.  
A 20" Western Larch scribed "T9S R34E S22 BT" bears S29°30'W, 52.7 ft.  
The new bearing trees have a 3/4" brass washer, marked "PLS 1636", nailed flush to the lower of double blazes and have sign 54-3, Bearing Tree, nailed above the blazes and sign 54-9, Land Survey Monument, nailed to the back of the tree.

I hereby certify the above corner point was perpetuated as hereon described on September 9, 1993.

Magnetic Declination: 20°E.

NAD1983 Geographic Position (+ or - 2 to 6 meters):  
Latitude 44-46-43.955 N  
Longitude 118-35-46.001 W

Witnessed by Troy Allen

**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**

*Dennis L. Gaylord*

**OREGON  
JULY 14, 1978  
DENNIS L. GAYLORD  
1636**

RENEWS 6/30/95

Office of COUNTY SURVEYOR County of GRANT  
State of Oregon, I hereby certify that the within instrument was filed in this office  
for record on the 21 day of June, 1994  
Robert D. Baggett by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)