

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


N - 21

History of original corner establishment:

Original corner was established by Herman D. Gradon on June 18, 1884, under contract No. 499, as follows:

Set a basalt stone, 18" x 12" x 10", 14" into the ground marked with 3 notches on the south and 1 notch on the east, from which:

- A 12" Pine bears N23°E, 39 links.
A 12" Pine bears S67°E, 32 links.
A 6" Pine bears S52°W, 34 links.
A 8" Pine bears N55°W, 40 links.
All properly scribed.

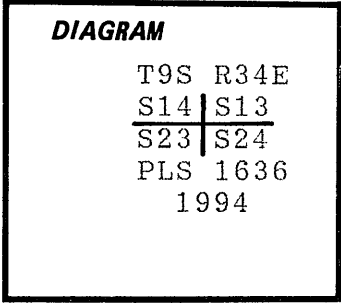

Description of corner evidence found:

Original corner stone is a loosely set granite stone 17" x 10" x 10" marked with one groove on the east face, from which:

- The original 12" Pine is a down and decayed Lodgepole Pine with full scribes visible. Root crown bears N23°E, 25.74 feet.
The original 6" Pine is a down and decayed Lodgepole Pine with scribes "BT" near the top of a large blaze. No other scribing. Root hole bears S52°W, 22.44 feet.
The original 8" Pine is a down and badly decayed Lodgepole Pine. No marks remain. Stump bears N51°W, 26.4 feet.
The original 12" Pine is a down and badly decayed Lodgepole Pine. Fragments of scribed wood are visible. Stump hole bears S67°E, 21.12 feet.

Description of monument and accessories I established to perpetuate the original location of this corner:

In place of the original corner stone, set a 2 1/2" x 30" aluminum pipe 22" into the ground in a mound of stones. I bury the corner stone along the west side of the pipe. A 3 1/4" aluminum cap attached to the pipe is marked as shown in the diagram, above. From which:

- A 10" Lodgepole Pine bears N39°E, 22.9 feet scribed "T9SR34ES13 BT".
A 31" double bole Western Larch bears S32°30'E, 66.2 feet scribed "T9SR34ES24 BT".
A 13" Lodgepole Pine bears S27°W, 8.6 feet scribed "T9SR34ES23 BT".
A 30" Englemann Spruce bears N51°W, 46.8 feet scribed "T9SR34ES14 BT".


All bearing trees have sign 54-3, "Bearing Tree", nailed above the blazes. The new bearing trees have sign 54-9, "Land Survey Monument", nailed to the back and have a 5/8" brass washer, marked "PLS 1636", nailed to the scribed "B" in the lower of two blazes.

I hereby certify the above corner position was perpetuated as hereon described on September 21, 1994.

Magnetic declination: 20°E.

NAD1983 Geographic position (+ or - 2 to 5 meters):

Latitude: 44-46-44.43 N
Longitude: 118-34-32.32 W

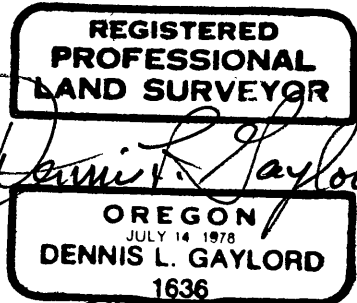

Office of... COUNTY SURVEYOR... County of... GRANT... State of... OREGON... I hereby certify that the within instrument was filed in this office for record on the... 29... day of... Sept... 1994... Robert D. Gaylord... (COUNTY OFFICIAL) by... (DEPUTY)

Renews 6/30/1995