

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

A-20


History of original corner establishment:

1983, Gary L. Langlitz, Registered Land Surveyor 1099, set a brass plaque in concrete (Grant Co. Map of Survey No. 828), from which:

A Lodgepole Pine 6" dia. bears S 15° W, 45.5 ft. marked E 1/16 S2 BT.

A Lodgepole Pine 6" dia. bears S 65° E, 107.0 ft. marked E 1/16 S2 BT.

Found unrecorded Pin (Grant Co. Map of Survey No. 924)
5.7 ft. North
6.6 ft. East

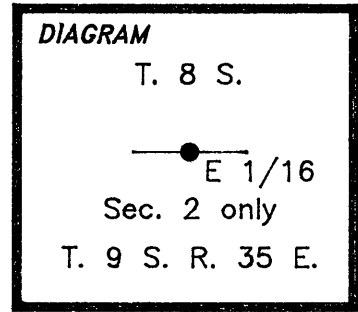


1999, Robert D. Bagett, Registered Land Surveyor 598, found the brass disk set in concrete (Grant County Map of Survey No. 1518), from which:
5/8" iron pin, N 55°22'55" E, 9.62 feet (Grant Co. Map of Survey No. 924).

Description of corner evidence found:

Found a 2 1/2" brass disk set in concrete in a hole in a rock outcrop, marked as shown, from which:

8" Lodgepole Pine, S 67 1/4° E, 106.4 feet with scribing "E1/16 S2" "BT" visible on a partially healed double blaze and 1 1/4" brass washer stamped "LS 1099" nailed to lower blaze.
8" Lodgepole Pine, S 13 1/2° W, 44.9 feet with scribing "E1/16 S2" "BT" visible on a partially healed double blaze and 1 1/4" brass washer stamped "LS 1099" nailed to lower blaze.
5/8" rebar, projecting 8" out of the ground, N 55°28' E, 9.64 feet.



Description of monument and accessories I established to perpetuate the original location of this corner:

None

REGISTERED
PROFESSIONAL
LAND SURVEYOR

David A. Schlaich

OREGON
JULY 16, 1987
DAVID A. SCHLAICH
2308

RENEWAL DATE: 06/30/2000

Magnetic Declination 19° East
WORK PERFORMED BY: David A. Schlaich (RLS 2308)
DATE: October 18, 1999

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 9 day of FEB, 192000
Robert D. Bagett by _____
(COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

SEE MAP OF SURVEY NO. 1543

A-20