


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established this survey by single proportionate distance between NE & NW corners of sec 1 T 9 S R 35 E and on the S line of the SE quarter sec 36 T 8 S R 35 E.

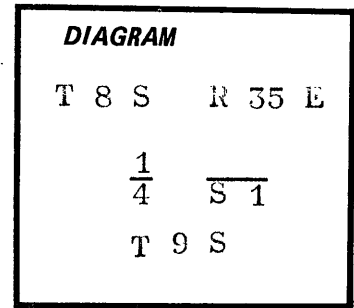

Description of corner evidence found:

None

*VOID  
superseded by revised remon sheet  
filed 8/2/79*

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 2½ inch brass cap on a 2 inch iron pipe 31 ins, in the ground with a 6 ft steel fence post alongside with a sign 54-4 attached.

Brass cap marked thus: T 8 S R 35 E

$\frac{1}{4}$  S 1

T 9 S

1979

ORLS 1639

New bearing trees:

A pine 6 ins diam bears S 54° E, 17.9 ft dist mkd 1/4 S 1 BT

This BT has a sign 54-3 attached below a band of red paint and a brass washer marked LS 1639 nailed flush with BT blaze.

I hereby certify that the above monument was established as herein described on June 13, 1979 witnessed by Tracy Labaree and Tom Fisk.

Office of...County..Surveyor..... County of...Grant  
State of...Oregon....., I hereby certify that the within instrument was filed in this office  
for record on the...13... day of...July....., 19...79  
*Albert D. Baggett* by .....  
(COUNTY OFFICIAL) (DEPUTY)

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*William L. Hanley*

OREGON  
JULY 14, 1978  
WILLIAM L. HANLEY  
1639