

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Corner set from 1884 survey by Herman D. Gradon under contract with the General Land Office

Set basalt stone 12" x 12" x 5" marked 1/4 on West face from which a:

6" Pine bears S 88° W 12 lks

7" Pine bears N 59° W 13 lks

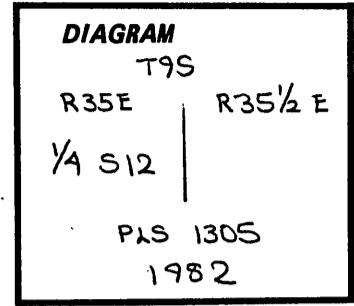

Description of corner evidence found:

NONE

Description of monument and accessories established to perpetuate the original location of this corner:

Set 2 1/2" brass cap in 2 1/2" x 30" G.I. pipe 4" out of ground with flared base and rock mound. Marked as per diagram above.

Scribed BTs: 5" larch bears S 2° W 33.9 ft., scribed 1/4 S12 BT  
5" Larch bears N 72° W 4.5 ft., scribed 1/4 S12 BT

I hereby certify the above corner monument was re-established as herein described on August 8, 1982

Witnesses: David Dean  
Pat Smith

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*James W. Prochnau*  
OREGON  
SEPTEMBER 23, 1977  
JAMES W. PROCHNAU  
1305

Office of *Sumner* County of *Grant*  
State of *Oregon*, I hereby certify that the within instrument was filed in this office  
for record on the *23* day of *Feb*, 19*83*  
*Robert D. Sargent* by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)